



The Timken Company

4500 Mt Pleasant St. NW


N. Canton, OH 44720

Phone: (234) 262-3000

E-Mail: CustomerCAD@timken.com • **Web site:** www.timken.com

Part Number 42350, Tapered Roller Bearings - Single Cones - Imperial

This is the most basic and most widely used type of tapered roller bearing. It consists of two main separable parts: the cone (inner ring) assembly and the cup (outer ring). It is typically mounted in opposing pairs on a shaft.

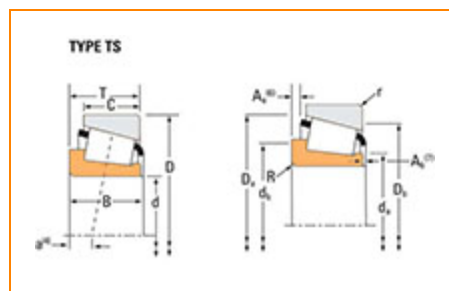

[Specifications](#) | [Dimensions](#) | [Abutment and Fillet Dimensions](#) | [Basic Load Ratings](#) | [Factors](#)

Specifications

Series	42000
Cone Part Number	42350
Design Units	Imperial
Cage Type	Stamped Steel
C1 - Dynamic Radial Rating (Two-Row, 1 million revolutions) ¹	75600 lbf 336000 N
C90(2) - Dynamic Radial Rating (Two-Row, 90 million revolutions) ²	19600 lbf 87100 N

Dimensions

d - Bore	3.5000 in 88.900 mm
B - Cone Width	1.1406 in 28.971 mm

Abutment and Fillet Dimensions

R - Cone Backface "To Clear" Radius³	0.12 in 3 mm
da - Cone Frontface Backing Diameter	3.86 in 98 mm
db - Cone Backface Backing Diameter	4.09 in 104 mm
Ab - Cage-Cone Frontface Clearance	0.14 in 3.6 mm
Aa - Cage-Cone Backface Clearance	0.1 in 2.5 mm
a - Effective Center Location⁴	0.12 in 3 mm

Basic Load Ratings

C90 - Dynamic Radial Rating (90 million revolutions)⁵	11300 lbf 50100 N
C1 - Dynamic Radial Rating (1 million revolutions)⁶	43400 lbf 193000 N
C0 - Static Radial Rating	54300 lbf 241000 N
C_{a90} - Dynamic Thrust Rating (90 million revolutions)⁷	9480 lbf 42200 N

Factors

K - Factor⁸	1.19
G1 - Heat Generation Factor (Roller-Raceway)	129.7
G2 - Heat Generation Factor (Rib-Roller End)	37.2
Cg - Geometry Factor⁹	0.139

¹ Based on 1×10^6 revolutions L_{10} life, for the ISO life calculation method.

² Based on 90×10^6 revolutions L_{10} life, for The Timken Company life calculation method. C_{90} and C_{a90} are radial and thrust values for a single-row, $C_{90(2)}$ is the two-row radial value.

³ These maximum fillet radii will be cleared by the bearing corners.

⁴ Negative value indicates effective center inside cone backface.


⁵ Based on 90×10^6 revolutions L_{10} life, for The Timken Company life calculation method. C_{90} and C_{a90} are radial and thrust values.

⁶ Based on 1×10^6 revolutions L_{10} life, for the ISO life calculation method.

⁷ Based on 90×10^6 revolutions L_{10} life, for The Timken Company life calculation method. C_{90} and C_{a90} are radial and thrust values for a single-row, $C_{90(2)}$ is the two-row radial value.

⁸ These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.

⁹ Geometry constant for Lubrication Life Adjustment Factor a_3 .

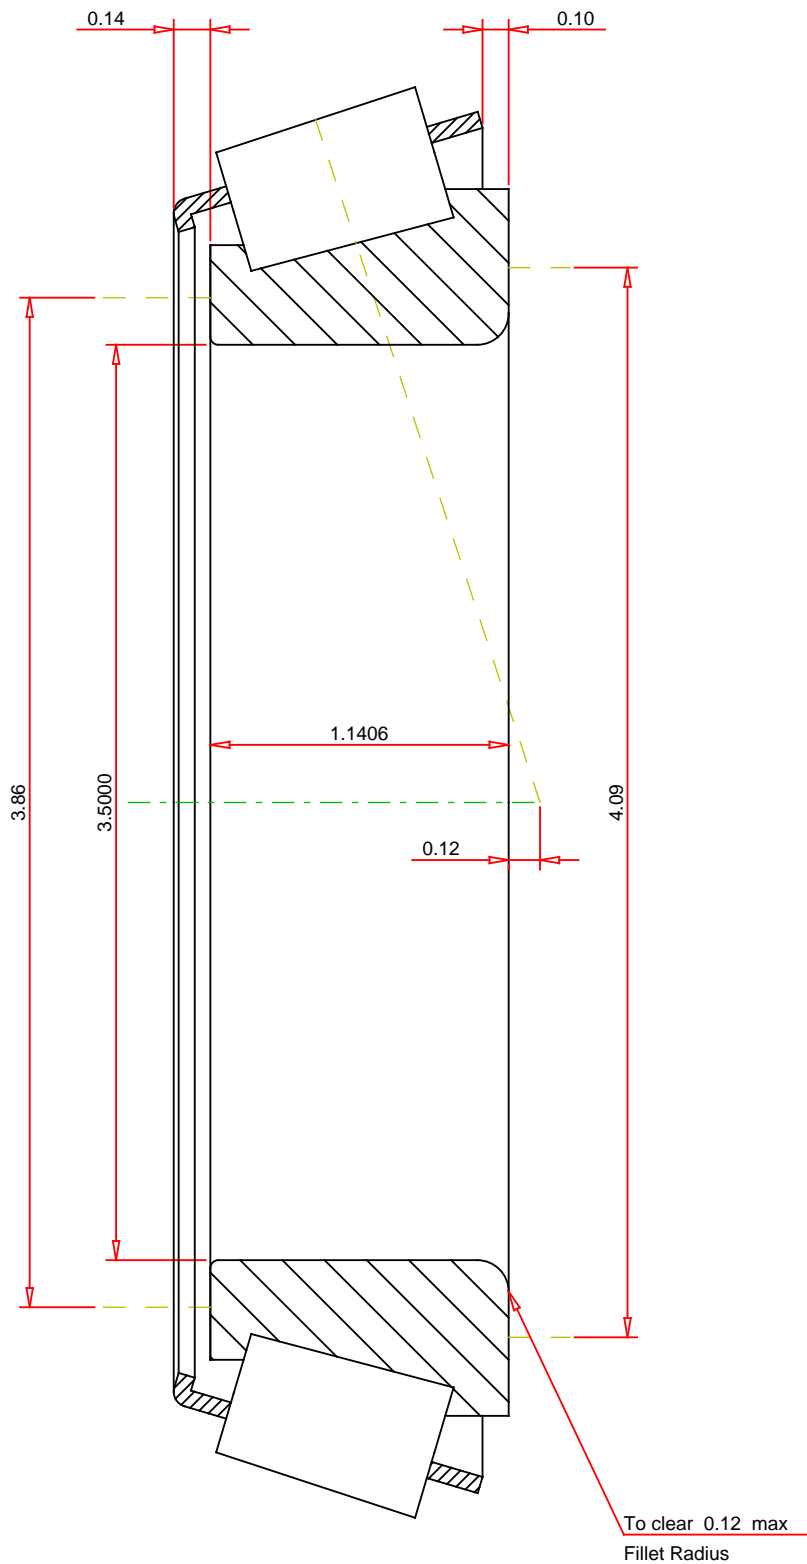

IMPERIAL UNITS

Number of Rollers Per Row 26

TIMKEN®

THE TIMKEN COMPANY
NORTH CANTON, OHIO USA

42350
SINGLE TAPERED CONE

K Factor	1.19	
Dynamic Radial Rating - C90	11300	lbf
Dynamic Thrust Rating - Ca90	9480	lbf
Dynamic Radial Rating - C1	43400	lbf

Every reasonable effort has been made to ensure the accuracy of the information contained in this writing, but no liability is accepted for errors, omissions or for any other reason.

FOR DISCUSSION ONLY