




VARLEY

- Pressed steel centre
- Pneumatic rubber tyre

PTW

wheel dia.	tread width	hub width	bore dia.	load cap.	ply rating	max. psi	plain bore	roller bearing	ball bearing
220	65	76	1"	90	4	30	PTW 8-1		
	65	63	1"	90	4	30		PTW 8-1RB	
260	85	76	1"	110	4	30	PTW 10-1		
	85	63	1"	110	4	30		PTW 10-1RB	
300	100	76	1"	130	4	30	PTW 12-1		
	100	63	1"	130	4	30		PTW 12-1RB	
400	100	66	1"	190	2	30	PTW 16-1		
	100	63	1"	190	2	30		PTW 16-1RB	
	100	83	1"	190	2	30			PTW 16-1BB

NOTE PTW series wheels are available with a 25mm roller bearing as an alternative to 1"

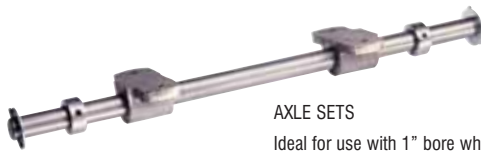

AXLE SETS

Ideal for use with 1" bore wheels

See page 13



VARLEY

- For road use
- Pressed steel centre
- High speed pneumatic rubber tyre
- Maximum speed: 100kph (62mph)

VRW

wheel dia.	tread width	hub width	bore dia.	load cap.	ply rating	max. psi	wheel without hub	wheel with hub
410	107	-	-	-	4	60	VRW 16-4	
	107	see below		265	4	60		VRW 16-1TM4
	107	-	-	-	6	70	VRW 16-6	
	107	see below		335	6	70		VRW 16-1TM6

DETACHABLE TIMKEN BEARING HUB complete with hub cap

Available separately. Order ref **HUBTM1**

