


854304

REF.	854304
CE	PPE regulation (EU) 2016/425 Annex II using EN 795:2012, TS 16415:2013
	x2
MAT.	 30 mm PES
R (kN) / MBS (kN)	19 kN / 23 kN
MAT.  	Acier 
LG. / f MIN. → MAX.	2.0 m → 20.0 m / 0.8 m → 3.2 m
	3.43 KG

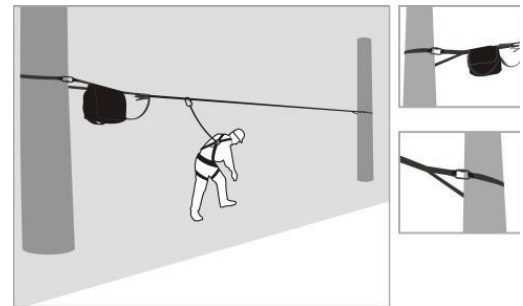

Nombre d'utilisateurs

Number of users

Cantidad de usuarios

Quantità di utilizzatori

Anzahl der Benutzer

Aantal gebruikers

R (kN) / MBS (kN)

Résistance statique (en kN) / Résistance à la rupture

Static strength / Minimum Breaking Strength

Resistencia estática (en kN) / Resistencia a la ruptura (en kN)

Resistenza statica (in kN) / Resistenza alla rottura (in kN)

Statische Festigkeit (in kN) / Bruchfestigkeit (in kN)

Statische sterkte (in kN) / breeksterkte



Matière connecteur / tendeur

Material of connector / tensioner

Material del conector / tensor

Materia del connettore / tenditore

Material Verbinder / Spanner

Materiaal van connector / spanner

LG. / f MIN. MAX.

Longueur mini → maxi / Flèche mini → maxi

Min. → Max. length / Min. → Max. deflection

Longitud mínima → máxima / Flecha mínima → máxima

Lunghezza min. → max. / Flessione min. → max.

Länge min. → max. / Dirchhang min. → max.

Lengte min → max / Doorbuiging min → max