



WEU26/3-103A00

WSU/WEU26-3

SAFETY SINGLE-BEAM SENSORS

SICK
Sensor Intelligence.



Ordering information

Scanning range	System part	Type	Part no.
20 m	Receiver	WEU26/3-103A00	1047985

Other models and accessories → www.sick.com/WSU_WEU26-3



Detailed technical data

Features

Scanning range	20 m
Dimension of the light path	0.5 m ... 20 m
Number of beams	1
Detection capability	30 mm
Response time	≤ 22 ms
Front screen heating	✓
Synchronization	Optical synchronisation

Safety-related parameters

Type	Type 4 (IEC 61496-1)
Safety integrity level	SIL3 (IEC 61508) SILCL3 (EN 62061)
Category	Category 4 (EN ISO 13849)
Performance level	PL e (EN ISO 13849)
B_{10d} parameter	1 x 10 ⁶ switching cycles (AC-15, 230 V, 0.4 A), 2.6 x 10 ⁵ switching cycles (AC-15, 230 V, 2.0 A), 1 x 10 ⁶ switching cycles (DC-13, 24 V, 0.6 A), 2 x 10 ⁵ switching cycles (DC-13, 24 V, 1.5 A)
PFH_D (mean probability of a dangerous failure per hour)	4.0 x 10 ⁻⁹ (EN ISO 13849)
T_M (mission time)	20 years (EN ISO 13849)
Safe state in the event of a fault	At least one OSSD is in the OFF state.

Interfaces

Connection type	PG gland (13,5)
Display elements	LEDs
Fieldbus, industrial network	
Integration via Flexi Soft safety controller	CANopen ¹⁾ DeviceNet™ EtherCAT®

¹⁾ For additional information on Flexi Soft → www.sick.com/Flexi_Soft.

EtherNet/IP™
Modbus TCP
PROFIBUS DP
PROFINET

¹⁾ For additional information on Flexi Soft -> www.sick.com/Flexi_Soft.

Electrical data

Protection class	I (EN 50178)
Supply voltage V_s	24 V DC (19.2 V DC ... 28.8 V DC)
Power consumption	≤ 8 W
Switch-on time	≤ 10 s ¹⁾
Switching outputs	Relays
Usage category	AC-15/DC-13 (EN 60947-5-1)
Switching voltage	10 V DC ... 30 V DC 10 V AC ... 230 V AC
Current-carrying capacity per OSSD	0.02 A ... 2 A
Contact material	Ag alloy with Au coating
Electrical life (relay contacts)	≥ 1 x 10 ⁵ switching cycles
Mechanical life (relay contacts)	≥ 1 x 10 ⁷ switching cycles

¹⁾ Upon applying the supply voltage.

Mechanical data

Design	Rectangular
Dimensions (W x H x D)	50 mm x 156 mm x 116 mm
Housing material	Aluminum die cast
Front screen material	Polycarbonate, scratch-resistant coating
Weight	≤ 1 kg

Ambient data


Enclosure rating	IP67 (EN 60529)
Ambient operating temperature	-25 °C ... +55 °C
Storage temperature	-25 °C ... +70 °C
Air humidity	15 % ... 95 %, Non-condensing
Vibration resistance	5 g, 10 Hz ... 55 Hz (IEC 60068-2-6)
Shock resistance	10 g, 16 ms (IEC 60068-2-29)

Classifications

ECI@ss 5.0	27272701
ECI@ss 5.1.4	27272701
ECI@ss 6.0	27272701
ECI@ss 6.2	27272701
ECI@ss 7.0	27272701
ECI@ss 8.0	27272701
ECI@ss 8.1	27272701
ECI@ss 9.0	27272701
ECI@ss 10.0	27272701

ECI@ss 11.0	27272701
ETIM 5.0	EC001831
ETIM 6.0	EC001831
ETIM 7.0	EC001831
ETIM 8.0	EC001831
UNSPSC 16.0901	46171620

Dimensional drawing (Dimensions in mm (inch))

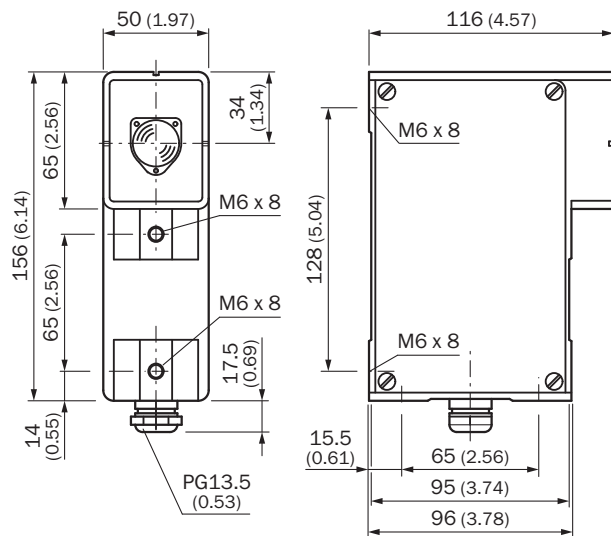

Recommended accessories

Other models and accessories → www.sick.com/WSU_WEU26-3

Brief description		Type	Part no.
Reduction and extension pieces			
Adapter for cable entry from PG 13 to PG 21		PG extension for PG13 to PG21	5306052
Alignment aids			
		AR60	1015741
		AR60 adapter, WSU/WEU26	4031156
Deflector mirrors			
		PNS75-008	1026647

	Brief description	Type	Part no.
		PSK1	1005229
		PSK45	5306053
Test and monitoring tools			
		Test rod 30 mm	2022602
Distributors			
	Two-way splitter	Two-way splitter	5305978
Mounting brackets and plates			
		BEF-4WNAEFAL1	2007900
		BEF-4AAAAHST3	2012473

SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is “Sensor Intelligence.”

WORLDWIDE PRESENCE:

Contacts and other locations –www.sick.com