




Cable Management

Steel Cable Trunking Technical Specification

Dimensions:

Manufactured from continuously hot-dip zinc coated low carbon steels strip and sheet for cold forming to BS EN 10142: 2000

3 metre lengths as standard

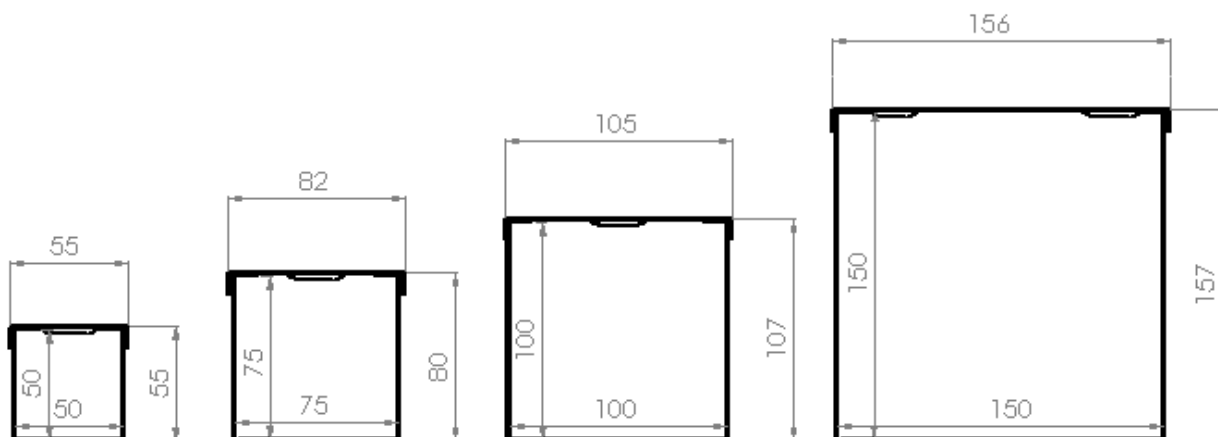

Cable Capacities Maximum number of cables (600/1000 PVC)												
Size of Trunking	Nominal Conductor Size (mm ²)											
Surface (mm)	1.0	1.5	2.5	4.0	6.0	10.0	16.0	25.0	35.0	50.0	70.0	95.0
50 x 50	138	123	85	67	52	33	24	16	12	9	7	5
75 x 50	208	185	128	101	79	51	37	24	18	13	10	7
75 x 75	312	273	191	152	118	76	55	37	28	20	16	11
100 x 50	277	247	170	135	95	67	49	39	25	18	14	10
100 x 75	416	370	256	203	158	101	74	49	37	27	21	15
100 x 100	555	494	350	271	211	135	98	66	50	37	28	21
150 x 75	624	556	382	304	237	152	111	74	56	41	32	23
150 x 100	833	741	510	406	316	203	148	99	75	55	42	31
150 x 150	1250	1112	766	609	475	305	222	148	112	83	64	47

IMPORTANT:

Cable trunking is designed such that the main body carries the weight of cables. Trunking should NOT be installed in any way that causes the lid to carry the cable weight.