

The Timken Company 4500 Mt Pleasant St. NW N. Canton, OH 44720

Phone: (234) 262-3000


E-Mail: <u>CustomerCAD@timken.com</u> • Web site: <u>www.timken.com</u>

Part Number H2309, Metric H Adapter Sleeve


- Safe and effective tapered bore bearing assembly.
- Includes mounting sleeve, locknut and lockwasher or lockplate.
- Other dimensions may be available, consult your Timken sales representative.

* Adapters with a C1 dimension use a lockplate as the locking device as shown in the illustration; otherwise, a lockwasher is used as the locking device.





Specifications -		
	d_1	40.00 mm
	L	50.00 mm
	С	11 mm
	Thread G	M45x1.5
	D_3	65 mm
	Weight	0.280 Kg
	Locknut	KM9
	Lockwasher and Lockplates	MB9

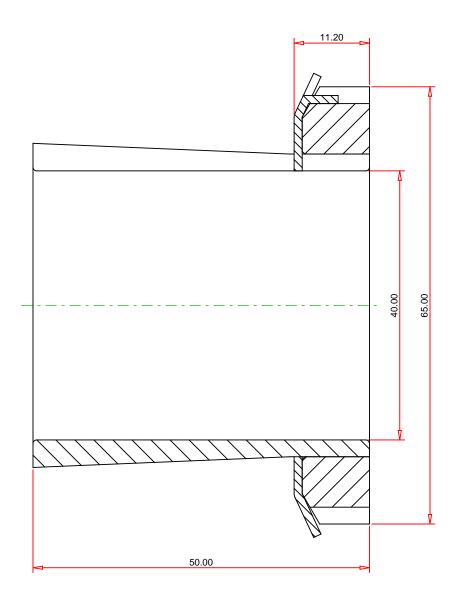

METRIC UNITS



H2309 Metric H Adapter Sleeve

THE TIMKEN COMPANY NORTH CANTON, OHIO USA

Every reasonable effort has been made to ensure the accuracy of the information contained in this writing, but no liability is accepted for errors, omissions or for any other reason.

FOR DISCUSSION ONLY