




Technical data

32216U

Single row tapered roller bearings

Tapered roller bearing, pressed steel cage

Visual(s)

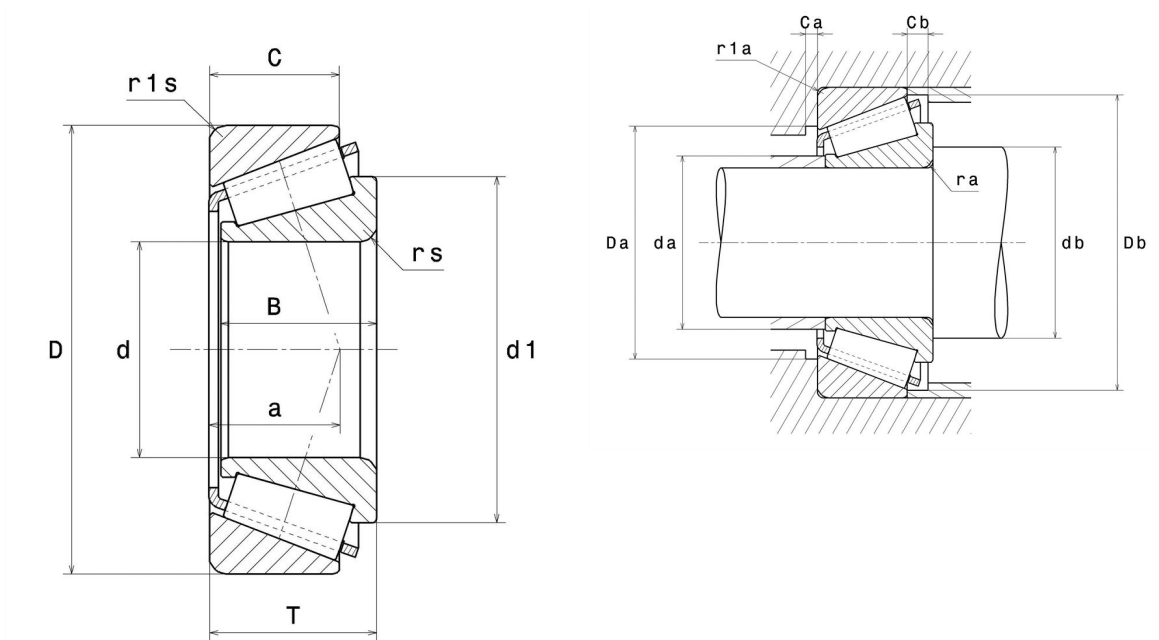

Product definition

d	80 mm
D	140 mm
B	33 mm
C	28 mm
T	35.25 mm
d1	107.5 mm
a	31 mm
rs min	2.5 mm
r1s min	2 mm
e	0.42
Y2	1.43
Y0	0.79
Mass	2.18 kg
ISO 355 reference	T3EC080
Brand	NTN

Product performance

Dynamic load, C	199 kN
Rating life coefficient, A2	1
Static load, C0	265 kN
Fatigue limit load, Cu	31.5 kN
Nlim (oil)	3,400 Tr/min
Nlim (grease)	2,500 Tr/min
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.43 Hz
Characteristic rolling element frequency, BSF	6.63 Hz
Characteristic outer ring frequency, BPF0	8.58 Hz
Characteristic inner ring frequency, BPFI	11.42 Hz

Abutment dimensions

da max	90 mm
db min	92 mm
Da min	122 mm
Da max	130 mm
Db min	134 mm
Ca min	4 mm
Cb min	7 mm
ra max	2 mm
r1a max	2 mm

Calculation factors

Equivalent dynamic radial load

$$P = X.F_r + Y.F_a$$

$F_a / F_r \leq e$		$F_a / F_r > e$	
X	Y	X	Y
1	0	0.4	Y2

Equivalent static radial load

$$P_0 = X_0.F_r + Y_0.F_a$$

X_0	Y_0
0.5	Y0

If $P_0 < F_r$, then use $P_0 = F_r$

The values for e, Y2 and Y0 are shown in the above table