



DIN Element Series

Return Series

- FPM (Fluoroelastomer) seals
- Collapse rating >10 bar (ISO2941)
- High performance fibreglass media

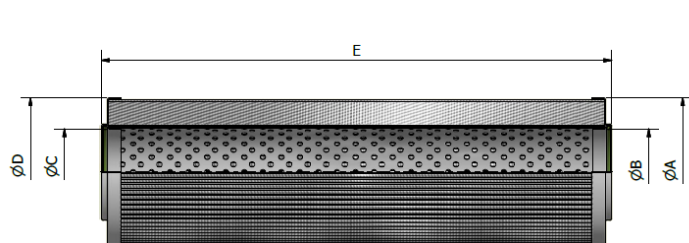

Type 1

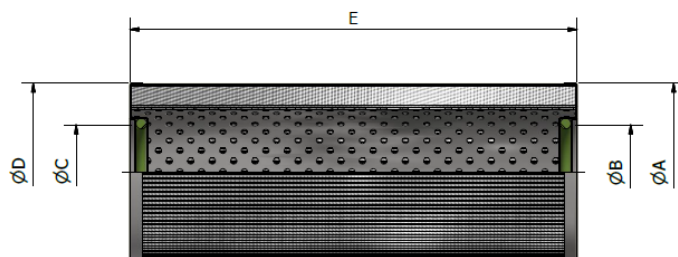

Type 2

Ordering Information

Part Number	Parker Description	*Flow l/min	Element Type	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	Efficiency $\beta_{x(c)} \geq 200$	Efficiency $\beta_{x(c)} \geq 1000$
940500Q	DIN0040R02QV	40	1	58	32.2	32.2	58	100	N/A	4.5
940501Q	DIN0040R05QV	40	1	58	32.2	32.2	58	100	6	7
940502Q	DIN0040R10QV	40	1	58	32.2	32.2	58	100	10	12
940503Q	DIN0040R20QV	40	1	58	32.2	32.2	58	100	20	22
940504Q	DIN0063R02QV	63	1	58	32.2	32.2	58	159	N/A	4.5
940505Q	DIN0063R05QV	63	1	58	32.2	32.2	58	159	6	7
940506Q	DIN0063R10QV	63	1	58	32.2	32.2	58	159	10	12
940507Q	DIN0063R20QV	63	1	58	32.2	32.2	58	159	20	22
940508Q	DIN0100R02QV	100	1	58	32.2	32.2	58	249	N/A	4.5
PR4499	DIN0100R05QV	100	1	58	32.2	32.2	58	249	6	7
PR4500Q	DIN0100R10QV	100	1	58	32.2	32.2	58	249	10	12
PR4501Q	DIN0100R20QV	100	1	58	32.2	32.2	58	249	20	22
940509Q	DIN0160R02QV	160	2	99	52.8	52.8	99	159	N/A	4.5
PR4502Q	DIN0160R05QV	160	2	99	52.8	52.8	99	159	6	7
PR4503Q	DIN0160R10QV	160	2	99	52.8	52.8	99	159	10	12
PR4504Q	DIN0160R20QV	160	2	99	52.8	52.8	99	159	20	22
940510Q	DIN0250R02QV	250	2	99	52.8	52.8	99	249	N/A	4.5
PR4505	DIN0250R05QV	250	2	99	52.8	52.8	99	249	6	7
PR4506Q	DIN0250R10QV	250	2	99	52.8	52.8	99	249	10	12
PR4507Q	DIN0250R20QV	250	2	99	52.8	52.8	99	249	20	22
PR4508	DIN0400R02QV	400	2	134	70.5	70.5	134	250	N/A	4.5
PR4509Q	DIN0400R05QV	400	2	134	70.5	70.5	134	250	6	7
PR4510Q	DIN0400R10QV	400	2	134	70.5	70.5	134	250	10	12
PR4511Q	DIN0400R20QV	400	2	134	70.5	70.5	134	250	20	22
PR4512Q	DIN0630R02QV	630	2	134	70.5	70.5	134	400	N/A	4.5
PR4513	DIN0630R05QV	630	2	134	70.5	70.5	134	400	6	7
PR4514Q	DIN0630R10QV	630	2	134	70.5	70.5	134	400	10	12
PR4515Q	DIN0630R20QV	630	2	134	70.5	70.5	134	400	20	22
PR4516Q	DIN1000R02QV	1000	2	154	90.5	90.5	154	400	N/A	4.5
PR4517Q	DIN1000R05QV	1000	2	154	90.5	90.5	154	400	6	7
PR4518Q	DIN1000R10QV	1000	2	154	90.5	90.5	154	400	10	12
PR4519Q	DIN1000R20QV	1000	2	154	90.5	90.5	154	400	20	22

Note:

Please consult Parker for the availability of alternative media and seal materials.

* Volumetric flow in l/min according to DIN 24550 where x is 25µm.

123
123

Item is standard
Item is non standard

