


"HIGH SECURITY" STOWING SYSTEM

Description

"High security" stowing system with hooks for separated fingers or together fingers.
 . Polyester (PES) multi-filament break-resistant = 6000 daN strap. . Double security: . 1. Protection from strap breaking: Polyurethane double belt loops for double protection against strap abrasion and for a better protection of the material being transported. . 2. Safety when unloading: Gradual (notch by notch) release runner to secure any unloading imbalances and resume control of cargo. . . Strap breakage: 6 tonnes . Width: 50 mm . Capacity length: 9 m . Short part: 0.3 m . Stretcher: gradual release. Standard: EN 12 195-2 03/ 2001

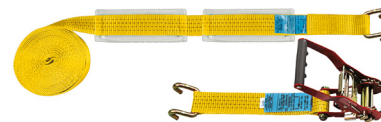

Characteristics

Ref.	EAN	Type of hook	Length m	Width mm	Model	Lashing capacity LC daN
864584	3660338190605	Open fingers	9	50	High security	6000
864585	3660338190612	Closed fingers	9	50	High security	6000