

## INSTALLATION & MAINTENANCE SHEET

Please read these instructions carefully before installation and retain for future reference.

## PRODUCT RANGE: XCITE LED MINIFLOOD COMPLETE WITH INTEGRAL MICROWAVE SENSOR AND REMOTE CONTROL

### Sensor detection range:

The detection angle of the xcite MINIFLOOD with integral microwave sensor option is  $160^{\circ}$  with a detection range of up to 8m, the detection range can be reduced using the sensitivity adjustment on the remote control; the default setting is 100%.

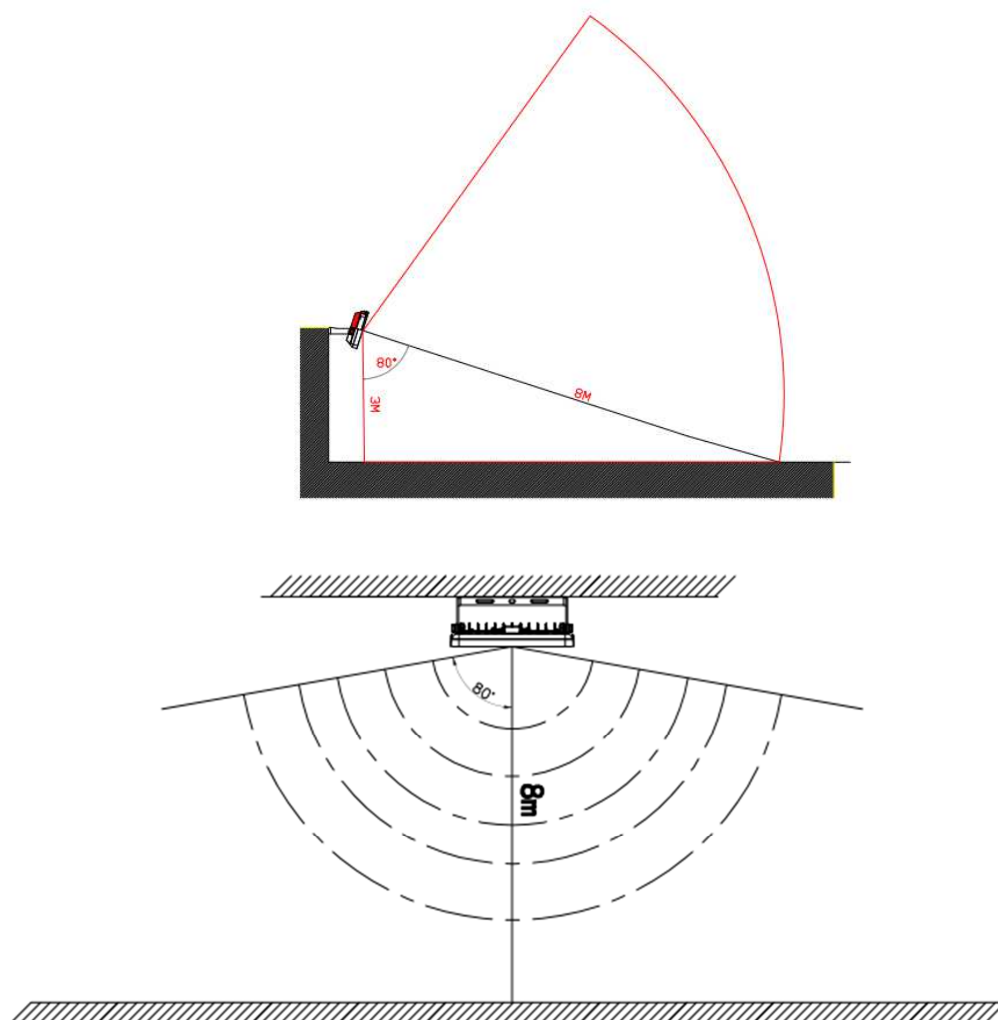


Figure 1 Detection pattern integral microwave sensor of xcite MINIFLOOD



ISSUE - 3 | DATE - 05/09/2017

For further information, please contact TamLite Technical  
Stafford Park 12, Telford, TF3 3BJ, United Kingdom  
Tel: +44(0)1952 292441 | Fax: +44 (0)1952 292155  
Email: [technical@tamlite.co.uk](mailto:technical@tamlite.co.uk)  
Web: [www.tamlite.co.uk](http://www.tamlite.co.uk)  
TamLite Lighting is a trading division of Saldon Products Ltd  
Registered No. 494829 England

## INSTALLATION & MAINTENANCE SHEET

Please read these instructions carefully before installation and retain for future reference.

**To set the below settings, aim the remote at the floodlight and press the desired option (note the floodlight will flash to indicate the setting has been registered).**

### Default Settings

- Sensitivity: 100%
- Duration Time: 10 Seconds
- Mode: Daylight

### Sensitivity

100%: 7-8m

75%: 5-6m

50%: 3-4m

25%: 1-2m


### Time

(Duration the luminaire will stay lit from last movement detected)

Min 5 secs > Max 24 hours.

### Mode

Daylight Mode		The floodlight will operate via the integral microwave sensor, presence is detected regardless of ambient light level.
Nightlight Mode		The floodlight will operate via the integral microwave sensor, presence is detected only at night.
Photocell Mode		The integral sensor will operate as a "dusk-to-dawn" photocell rather than a presence detector.
Not used		No Function.
Manual Override Mode		Overrides floodlight to stay on continuously.
Flash Mode		Floodlight will constantly flash.
SOS Mode		Floodlight will constantly SOS flash.
Off Mode		Overrides floodlight to stay off continuously.

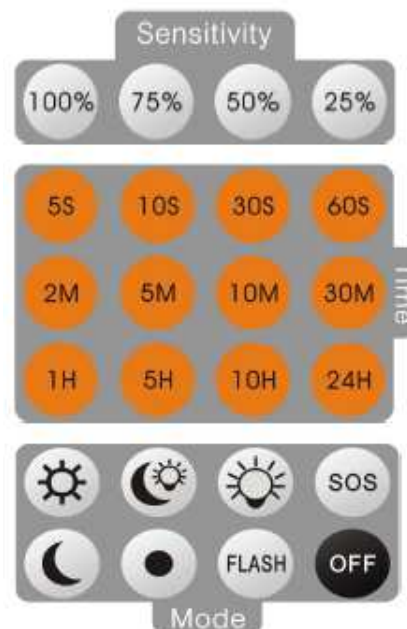

ISSUE - 3 | DATE - 05/09/2017

For further information, please contact TamLite Technical  
 Stafford Park 12, Telford, TF3 3BJ, United Kingdom  
 Tel: +44(0)1952 292441 | Fax: +44 (0)1952 292155  
 Email: [technical@tamlite.co.uk](mailto:technical@tamlite.co.uk)  
 Web: [www.tamlite.co.uk](http://www.tamlite.co.uk)  
 TamLite Lighting is a trading division of Saldon Products Ltd  
 Registered No. 494829 England