



Fall Protection



3M™ Protecta® Comfort Belt Style  
Fall Arrest Suspension Harness

**Designed to offer workers comfort  
and versatility in rope access  
and suspension work applications.**

The new generation of 3M™ Protecta® Fall Arrest harnesses has been further expanded to include a suspension model. Designed specifically to offer rope access and suspension workers comfort, reliability and versatility.

## More comfort:


1. Extra large, comfortable, lightweight and breathable shoulder and back pads
2. Softer and more durable hip padding for extra comfort
3. Removable leg pads
4. No sharp edges on the webbing
5. Double adjustment of leg straps (size and height) ensures perfect positioning during suspension

## Easier donning and increased safety:

6. Large stand up rear fall arrest D-ring for easier reach
7. Large cranked suspension D-ring for easier connection
8. Twist-lock carabiner for safer, automatic connection between lower and upper part of the harness
9. Front and back impact indicators make it simple to inspect the harness for damage and help ensure it's safe to use
10. Front fall arrest D-ring for additional fall arrest connection options
11. Shoulder adjustment buckle
12. 2 x large cranked work positioning D-rings on belt
13. Quick-connect buckles on leg straps for quick closure

## Designed to meet your tool and equipment carrying needs:

14. 2 x auto-resetting lanyard keepers provide easy parking and release of snap hooks and carabiners
15. 4 x gear tool loops to store and secure several tools

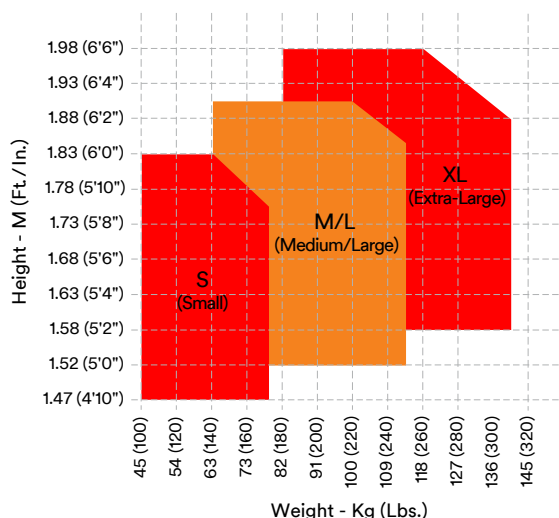

Size	Reference
Small (S)	1161764
Medium/Large (M/L)	1161765
Extra Large (XL)	1161766

## Specifications:

<b>Webbing:</b>	45mm polyester
<b>Thread:</b>	Polyester
<b>Buckles:</b>	Quick connect buckles and pass through buckles. Steel, zinc-plated, black electro-deposition paint
<b>Adjustments:</b>	Torso, waist, legs (diameter and height)
<b>Attachment D-rings:</b>	Steel, zinc plated, black electro-deposition paint
<b>Operating temperature:</b>	-35 °C to +57 °C
<b>Weight capacity:</b>	140 kg
<b>Weight:</b>	2.65 kg (M/L size model)
<b>Standards:</b>	CE EN 361:2002 (Full body fall arrest harness) CE EN 358:2018 (Work positioning harness) CE EN 813:2008 (Sit harness)

## Important notice

**Product Selection and Use:** Many factors beyond 3M's control and uniquely within user's knowledge and control can affect the use and performance of a 3M product in a particular application. As a result, customer is solely responsible for evaluating the product and determining whether it is appropriate and suitable for customer's application, including conducting a workplace hazard assessment and reviewing all applicable national and/or European regulations and standards. Failure to properly evaluate, select, and use a 3M product in accordance with all applicable instructions and with appropriate safety equipment, or to meet all applicable safety regulations, may result in injury, sickness, death, and/or harm to property.

**Warranty, Limited Remedy, and Disclaimer:** A limitation of liability applies to the 3M product(s). For warranty statement and limitation of liability, refer to your supply agreement or the 3M terms & conditions of sale.

3M industrial and occupational products are intended, labeled, and packaged for sale to trained industrial and occupational customers for workplace use.

### 3M Personal Safety Division

#### 3M United Kingdom PLC

3M Centre  
Cain Road  
Bracknell  
RG12 8HT  
United Kingdom  
t: 0870 60 800 60  
www.3M.co.uk/ppesafety

#### 3M Ireland Limited

The Iveagh Building  
The Park, Carrickmines  
Dublin 18  
Ireland  
www.3M.co.uk/ppesafety

