




Technical data

4T-LM603049

Single row tapered roller bearings

Mounted cone, sheet metal cage

Visual(s)

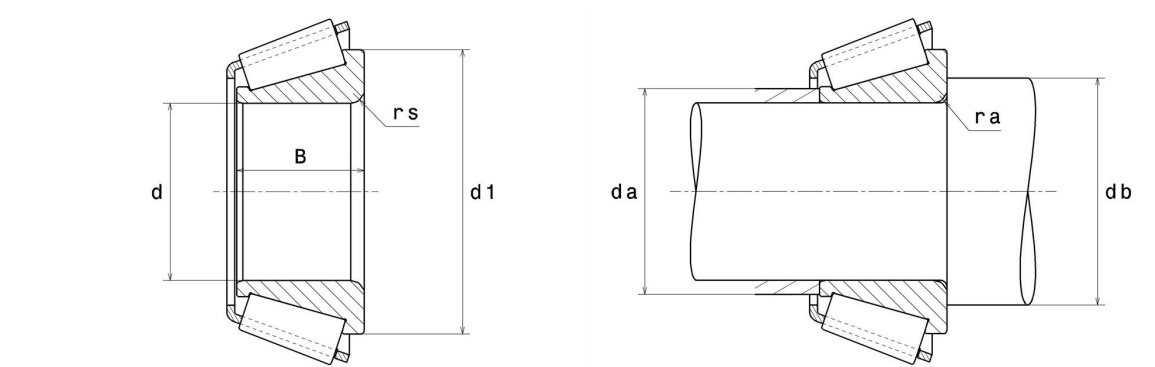

Product definition

d	45.24 mm
B	19.84 mm
d1	61.5 mm
e	0.43
Y2	1.41
Y0	0.77
Brand	NTN

Product performance

Dynamic load, C	57.5 kN
Rating life coefficient, A2	1.4
Static load, C0	73.5 kN
Fatigue limit load, Cu	9 kN
Nlim (oil)	6,200 Tr/min
Nlim (grease)	4,600 Tr/min
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.44 Hz
Characteristic rolling element frequency, BSF	7.72 Hz
Characteristic outer ring frequency, BPF0	9.21 Hz
Characteristic inner ring frequency, BPFI	11.79 Hz

Abutment dimensions

ra max	3.5 mm
--------	--------

Calculation factors

Equivalent dynamic radial load

$$P = X.F_r + Y.F_a$$

$F_a / F_r \leq e$		$F_a / F_r > e$	
X	Y	X	Y
1	0	0.4	Y2

Equivalent static radial load

$$P_0 = X_0.F_r + Y_0.F_a$$

X_0	Y_0
0.5	Y0

If $P_0 < F_r$, then use $P_0 = F_r$

The values for e, Y2 and Y0 are shown in the above table