



Technical data

USFD207-22T20


Bearing units

Grey cast housing, radial insert ball bearing with socket set screws, single lip seal, for high-temp. applications

KIT CONTENT

US207-22G2T20, FD207

VISUAL (S)

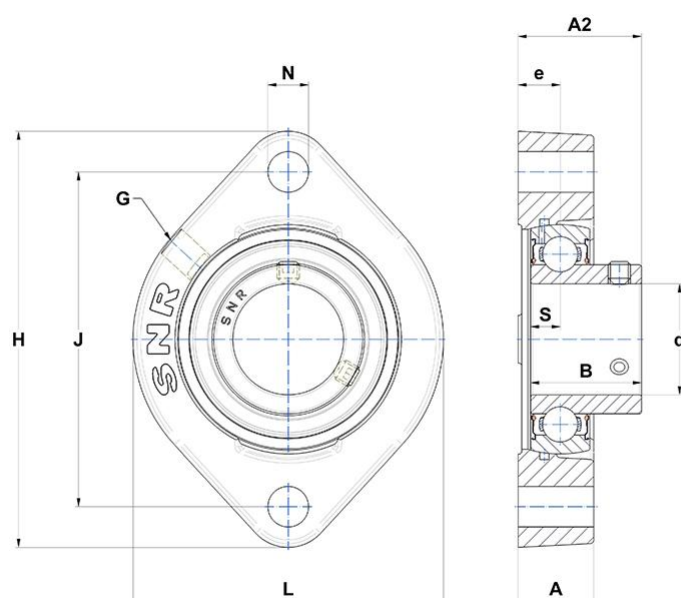

PRODUCT DEFINITION

A - Housing height	22 mm
A2 - Total height from mounting surface	35,9 mm
B - Width of Inner Ring	32 mm
d - Shaft diameter	34,925 mm
e - Distance mounting surface to bearing center	12,4 mm

PRODUCT DEFINITION

G - Grease fitting	R1/8"
H - Housing length, width or diameter	126 mm
J - Mounting holes distance	100 mm
L - Housing width / diameter	94 mm
N - Mounting hole dimension	11 mm
S - Dist. cent. of raceway to face IR on side opp. lock. device	8,5 mm
Brand	SNR

PRODUCT PERFORMANCE

C - Dynamic load rating	25,7 kN
C0 - Static load rating	15,2 kN
Operating temperature min.	-20 °C
Operating temperature max.	200 °C

OTHER FEATURES

Mass	0,88 kg
Recommended tightening torque for set screw	8 N-m