



Technical data

HK2820LL/3AS

Drawn cup needle roller bearings, opened end



Visual(s)

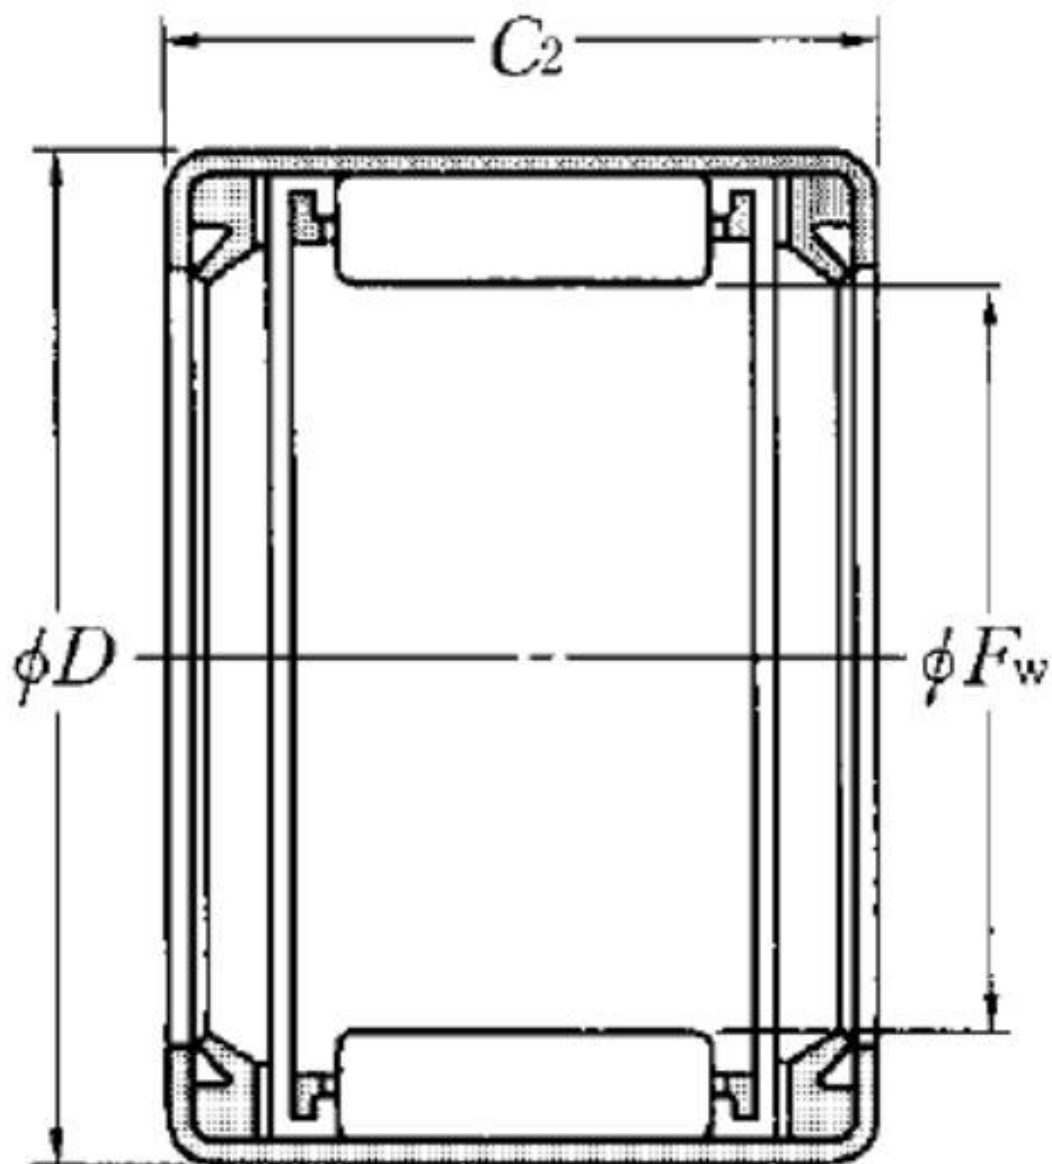

Product definition

Fw	28 mm
D	35 mm
C2	20 mm
Dw	2.5 mm
Lw	11.8 mm
Lubrication hole on outer ring	Non/No
Inner ring reference	IR22X28X23
Mass	0.04 kg

Product performance

Cr	17.3 kN
C0r	27.6 kN
Nlim (grease)	5,500 Tr/min
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	100 °C
Characteristic cage frequency, FTF	0.46 Hz
Characteristic rolling element frequency, BSF	12.12 Hz
Characteristic outer ring frequency, BPF0	11.02 Hz
Characteristic inner ring frequency, BPFI	12.98 Hz