
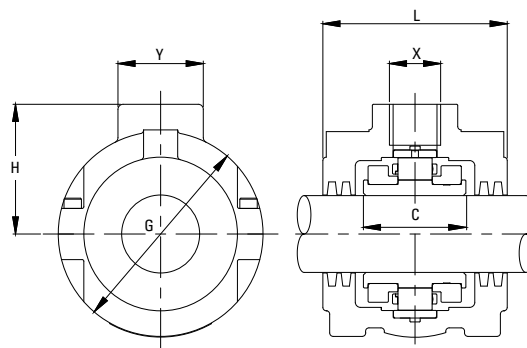




continued from previous page

Shaft (d)		Support Reference		C	G	L	H	X ⁽¹⁾	Y
mm	in.			mm in.	mm in.	mm in.	mm in.	mm in.	mm in.
100	3 1/16	LSM100HG LSM105HG	LSE311HG	85.0 3.346	210 8.3	152 6.0	128 5.0	M36 1 1/2 - 6 UNC	76 3.0
105	3 3/8		LSE312HG						
	3 15/16		LSE315HG						
	4		LSE400HG						
110	4 3/16	LSM110HG LSM115HG	LSE403HG	90.0 3.543	232 9.1	156 6.1	140 5.5	M36 1 1/2 - 6 UNC	76 3.0
115	4 1/4		LSE404HG						
	4 7/8		LSE407HG						
	4 1/2		LSE408HG						
120	4 11/16	LSM120 LSM125 LSM130	LSE411	95 3.740	276 10.866	162 6.378	156 6.142	M36 1 1/2 - 6 UNC	76 2.992
125	4 3/4		LSE412						
130	4 15/16		LSE415						
	5		LSE500						
135	5 3/16	LSM135 LSM140	LSE503	98.4 3.874	280 11.024	158 6.220	160 6.299	M36 1 1/2 - 6 UNC	75 2.953
140	5 1/4		LSE504						
	5 7/8		LSE507						
	5 1/2		LSE508						

⁽¹⁾ Hanger units with inch bore sizes have UNC mounting threads as standard. Hanger units with metric bore sizes have metric mounting threads as standard