

Type : 3EL080M2C-FA-A0-C34

RE: 891473

Date : 03.01.2022

Power [kW]	: 1.10	Efficiency Class	: IE3
Input Voltage [V]	: 400	Duty Cycle	: S1
Connection Type [Δ / Y]	: Y	Service Factor	: 1.20
Frequency [Hz]	: 50	Frame Size	: 080M
Pole Number	: 2	Weight [kg]	: 10.9
Nominal Speed [rpm]	: 2880	Insulation Class	: F [155°C]
Nominal Current [A]	: 2.26	Temperature Rise	: B [80°K]
Nominal Moment [Nm]	: 3.64	Protection Class	: IP55
Nominal Efficiency [η]	: 82.7	Vibration Severity Grade	: A
Power Factor [$\cos\phi$]	: 0.85	Method of Cooling	: IC411
Locked Rotor Current [I_a/I_n]	: 6.8	Direction of Rotation	: Bidirectional
Locked Rotor Torque [Ma/Mn]	: 3.1	Balance	: Half Key
Breakdown Torque [Mk/Mn]	: 3.8	Motor Protection	: --
Motor Color	: RAL 7031	Altitude Above Sea Level	: 1000m
Ambient Temperature	: -15°C / +40°C	Sound Pressure Level [dBA]	: 54

ELECTRICAL DATA

Δ / Y	U [V]	f [Hz]	P [kW]	n [rpm]	I [A]	η [%]	$\cos\phi$
Δ	230	50	1.10	2880	3.91	82.7	0.85
Y	400	50	1.10	2880	2.26	82.7	0.85
Y	460	60	1.28	3470	2.21	84.0	0.86


MECHANICAL DATA

Moment of Inertia [kgm ²]	: 0.00124
Bearing DS / NS	: 6204ZZ / 6204ZZ
Frame Material	: Aluminum
Flange Type / Material	: B5 / Aluminum
Cooling Fan Material	: Plastic
End Shield Material	: Aluminum

TERMINAL BOX

Terminal Box Material	: Aluminum
Terminal Box Position	: Top
Terminal Box Cable Entry	: M20x1.5
Terminal Box Blind Cap	: M16x1.5
Contact Screw Thread	: M4

MECHANICAL DIMENSIONS

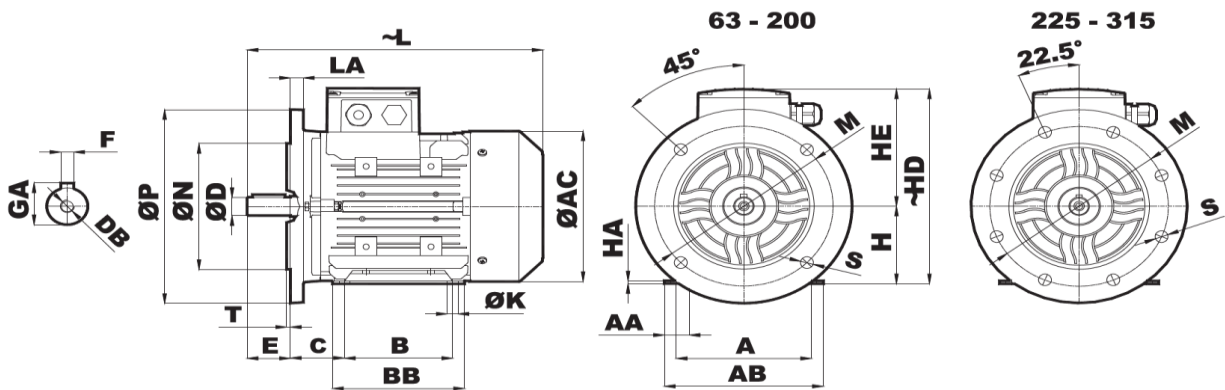

FLANGE TYPE	D	E	N	P	T	LA	L	AC	S	M	H	HE	HD	F	GA	DB	C	ϕK	B	BB	HA	AA	A	AB
B5	19	40	130	200	3.5	12	274	155	12	165	80	123	203	6	21.5	M6	50	10	100	122	3	25	125	148

Manufactured and tested in accordance with IEC 60034

*Technical data are subject to change! There may be discrepancies between calculated and rating plate values.

*MECALINE has right to change all the data without prior notice.

FR.AG.010 REV. NO: 03 REV TARİHİ : 01.01.2021

Europe
Rubix Engineering
61 Avenue Tony Garnier
69007 Lyon
France

UK
Brammer UK Ltd (A Rubix Company)
Dakota House, Concord Business Park
Manchester M22 0RR
UK