


SILENCER (1, 2, 4), EXHAUST PROTECTOR (3)

		catalogue number				
		(1)	(2)	(3)	(4)	(5)
operating pressure		0 to 10 bar		0 to 12 bar	0 to 10 bar	0 to 14 bar
ambient temperature		-10°C to +80°C				
construction	body	porous plastic	porous bronze	bronze	stainless steel	zinc-plated steel, bichromate
	connection piece	plastic	brass	brass	Nickel plated brass	
	diffuser	-	-	-	-	brass
pipe size	Ø M5	34600405	34600207	34600491	34600484	-
	G 1/8	34600406	34600001	34600492	34600418	M1MB
	G 1/4	34600407	34600002	34600493	34600419	M2MB
	G 3/8	34600408	34600003	34600494	34600478	M3MB
	G 1/2	34600409	34600004	34600495	34600479	M4MB
	G 3/4	34600410	34600005	34600496	-	M5MB
	G 1	34600411	34600006	34600497	-	M6MB

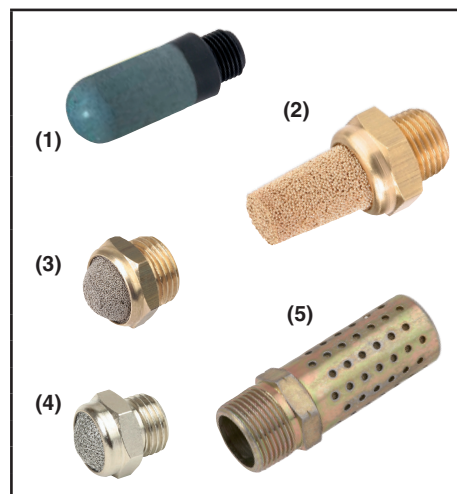

SHUTTLE VALVE

Fluid Air or filtered neutral gas, lubricated or not

Operating pressure 1 to 10 bar

Ambient temperature -10°C to +60°C

CONSTRUCTION

Body Black anodised aluminium

Internal parts Steel + NBR (nitrile)

pipe size	Ø orifice (mm)	catalogue number
G 1/8	3,2	34600127
G 1/4	6	34600119



NON-RETURN VALVE

Fluid Air or filtered neutral gas, lubricated or not

Operating pressure

plastic body 1 to 10 bar

metal body 0,5 to 10 bar

Ambient temperature -10°C to +60°C

CONSTRUCTION

Body


instant fittings version Technical polymer

tapped version Brass nicked

Internal parts Light alloy and brass

Seals NBR (nitrile)

pipe size	flow at 6 bar (l/min)	catalogue number
(4) plastic body (instant fittings)		
Ø 4 mm ext.	330	34602445
Ø 6 mm ext.	665	34602446
Ø 8 mm ext.	1630	34602447
(5) metal body (tapped)		
Ø M5	190	34602412
G 1/8	920	34602124
G 1/4	1650	34602125
G 3/8	2400	34602444
G 1/2	3500	34602126

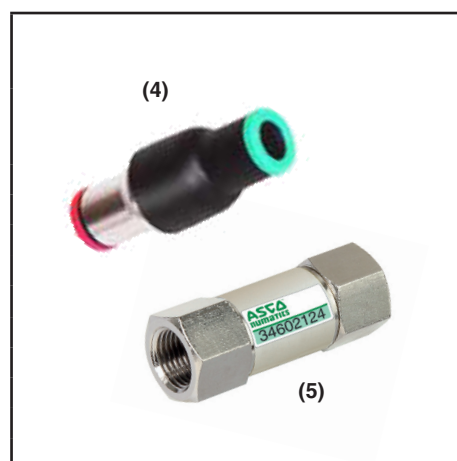

QUICK EXHAUST VALVE

Fluid Air or filtered neutral gas, lubricated or not

Operating pressure 0,5 to 10 bar

Ambient temperature -10°C to +60°C

CONSTRUCTION

Body Light alloy

Membran NBR (nitrile)

pipe size	Ø orifice (mm)	catalogue number
G 1/4	12	34600136
G 3/8	12	34600137
G 1/2	20	34600138
G 3/4	20	34600139



PNEUMATIC INDICATOR

Fluid Air or filtered neutral gas, lubricated or not

Operating pressure 2 to 8 bar

Ambient temperature +5°C to +70°C

Angle of vision 180°

CONSTRUCTION

Lens PC (polycarbonate)

Body and collar POM (polyacetal)

Nut Brass

		catalogue number
color		
red		34600130
green		34600131
yellow		34600132

