


Technical data

NKX20T2Z

Combined bearings

Visual(s)

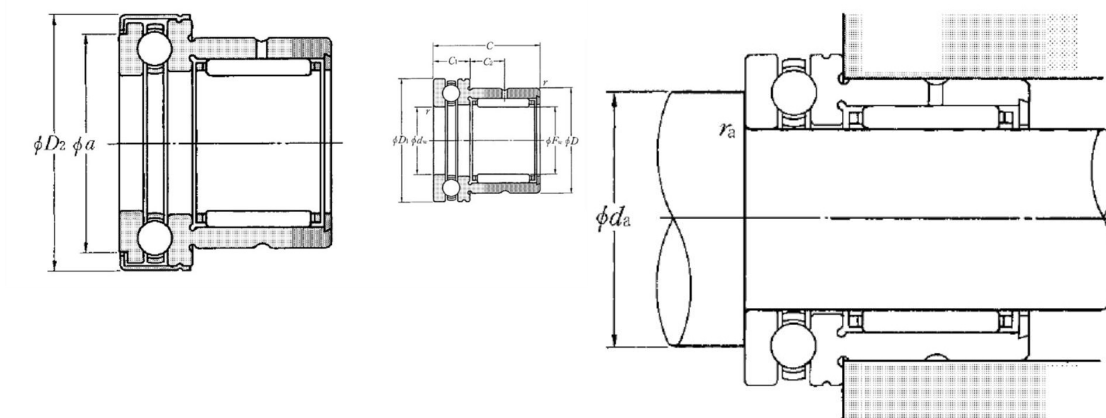

Product definition

Fw	20 mm
dw	20 mm
D	30 mm
D2	36 mm
C	30 mm
C1	10 mm
C2	10.5 mm
a	30.7 mm
rs min	0.3 mm
Dw	2 mm
Dw1	5.56 mm
Lw	15.8 mm
Lubrication hole on outer ring	Oui/Yes
k	2.5 mm
Precision class	P0
Mass	0.09 kg
Brand	NTN

Product performance

Cr	16.4 kN
Ca	14.2 kN
C0r	27.1 kN
C0a	24.7 kN
Nlim (grease)	5,200 Tr/min
Nlim (oil)	7,500 Tr/min
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	120 °C

Abutment dimensions

da min	29 mm
ras max	0.3 mm