



Technical data

UCPE207


Bearing units

Grey cast housing, radial insert ball bearing with socket set screws, seal with slinger

KIT CONTENT

UC207G2, PE207

VISUAL (S)

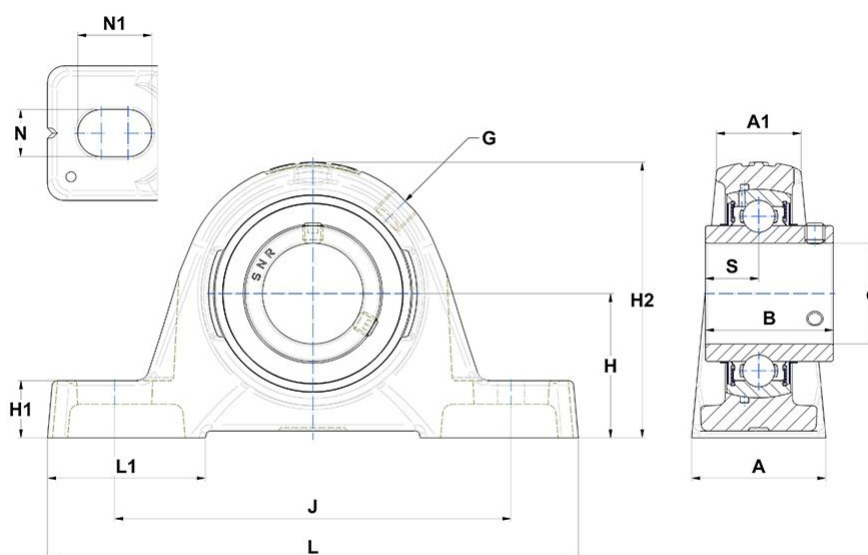

PRODUCT DIMENSIONS

A - Housing width	45 mm
A1 - Housing top width	27 mm
B - Width of Inner Ring	42,9 mm
d - Shaft diameter	35 mm
G - Grease fitting	R1/8"
H - Distance mounting base to centerline spheric. seating diam.	47,6 mm

PRODUCT DIMENSIONS

H1 - Housing foot height	19 mm
H2 - Housing height	93 mm
J - Mounting holes distance	126 mm
L - Housing length	163 mm
L1 - Housing foot length	49 mm
N - Mounting hole dimension	14 mm
N1 - Mounting hole length	21 mm
S - Dist. cent. of raceway to face IR on side opp. lock. device	17,5 mm
Brand	SNR

PRODUCT PERFORMANCE

C - Dynamic load rating	25,7 kN
C0 - Static load rating	15,2 kN
Operating temperature min.	-20 °C
Operating temperature max.	100 °C

OTHER FEATURES

Mass	1,57 kg
Recommended tightening torque for set screw	11.5 N-m