

A dramatic, low-key photograph of Thor, the Norse god of thunder, holding his hammer Mjolnir aloft. He is surrounded by bright, crackling lightning bolts against a dark, stormy background. The lighting is primarily from the lightning, creating a high-contrast, ethereal effect. Thor's long, wavy hair and beard are visible, and he wears a simple, draped garment.

# ***THOR***

**SOFT FACED HAMMERS**

# THOREX NYLON & PLASTIC HAMMERS



With chrome plated zinc heads (except 720N) Thorex Hammers are fitted with two durable white nylon faces or with two medium red plastic faces. Nylon hammers have the option of either wood or plastic handles. All hammers can be fitted with fibreglass handles to special order.

Thorex Nylon Hammer			Thorex Plastic Hammer Wood Handle 2 red plastic faces	Wood Handle Approx Weight	Face Diameter	
Plastic Handle	Approx Weight	Wood Handle				
2 white nylon faces		2 white nylon faces				
Ref No.	g	Ref No.	Ref No.	g	inch	mm
-	-	12-708N	13-708P	250	1	25
11-710	445	12-710N	13-710P	385	1.1/4	32
11-712	650	12-712N	13-712P	570	1.1/2	38
11-714	850	12-714N	13-714P	760	1.3/4	44
11-716	1230	12-716N	13-716P	1230	2	50
All the above have Chrome plated Zinc heads. 12-720N only available with Black Cast Iron head.						
		12-720N	-	2200	2.1/2	63

- Worn faces can be quickly replaced BY HAND providing minimum down time.
- All faces are one piece mouldings.
- There are no metal pegs or inserts which can damage the workpiece when worn.
- Serrations in the metal head prevent faces loosening in use.
- Faces have a shoulder for extra strength and to prevent fracture from misdirected blows.

To suit a wide range of hammering applications 5 alternative hardness of screw-in faces are available – colour coded for easy identification.

## THORACE DEAD BLOW NYLON HAMMERS



Thorace dead blow hammers are a coated die-cast head and handle of aluminium alloy with shock absorbent rubber grip.

The hollow head is partially filled with steel shot which adds to the weight, prevents rebound and delivers 'dead' blows of maximum impact.

Fitted as standard with two screw-in durable nylon faces which when worn can be quickly replaced by hand.

For certain applications tough brown polyurethane faces Ref. T. may be preferred.

**THE IDEAL HAMMER FOR SUSTAINED AND EFFECTIVE BLOWS WITHOUT RECOIL.**  
Used by Engineers, Sheet Metal Workers, Fitters, Tool Makers etc.

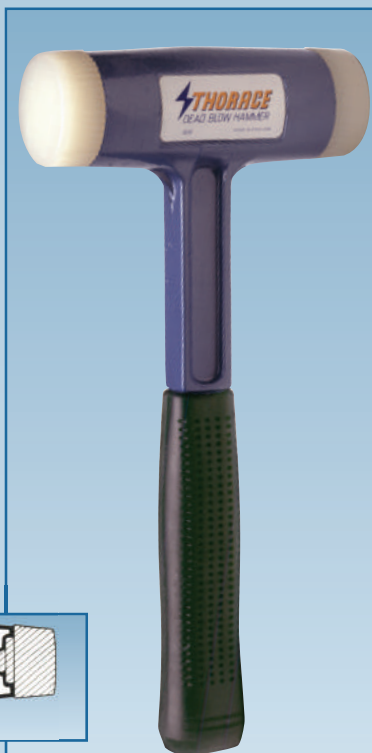

**Soft Grey PVC** Shore A63-73: Will not mark finished surfaces. Ideal for use in flat pack furniture assembly, woodworking.

**Medium Hard Red** Plastic Shore D45-55: More suited for light hammering applications and the assembly of precision part.

**Tough Brown** Polyurethane Shore D58-62: Tough and abrasive resistant therefore ideal for striking sharp surfaces including cutting forms, steel rule dia assembly.

**Hard White Nylon** Shore D57-61: The best all-purpose face for light and heavy assembly work.

**Extra Hard Yellow** Rockwell R103: Extra hard faces for specialist applications only eg setting copper armatures.

Nylon Hammer 2 white faces	Approx Weight	Face Diameter		Nominal Length	Spare White Nylon Face
Ref No.	g	inch	mm	mm	Ref No.
20-1010	550	1.1/4	32	275	76-710NF
20-1212	700	1.1/2	38	305	76-712NF
20-1414	900	1.3/4	44	310	76-714NF
20-1616	1150	2	50	325	76-716NF
20-2020	1850	2.1/2	63	370	76-720NF

## SPARE FACES



Face Diameter		Pack Quantity	Soft Grey Shore A 63-73	Medium Red Shore D 45-55	Tough Brown Polyurethane Shore D 58-62	Hard White Nylon Shore D 57-61	Extra Hard Yellow Rockwell R103
inch	mm		Ref No.	Ref No.	Ref No.	Ref No.	Ref No.
1	25	10	76-708VF	76-708PF	76-708TF	76-708NF	76-708AF
1.1/4	32	10	76-710VF	76-710PF	76-710TF	76-710NF	76-710AF
1.1/2	38	10	76-712VF	76-712PF	76-712TF	76-712NF	76-712AF
1.3/4	44	10	76-714VF	76-714PF	76-714TF	76-714NF	76-714AF
2	50	10	76-716VF	76-716PF	76-716TF	76-716NF	76-716AF
2.1/2	63	10	-	-	76-720TF	76-720NF	-