



Technical data

EXFL208


Bearing units

Grey cast housing, radial insert ball bearing with eccentric locking collar, seal with slinger

KIT CONTENT

EX.208.G2, FL208

VISUAL (S)

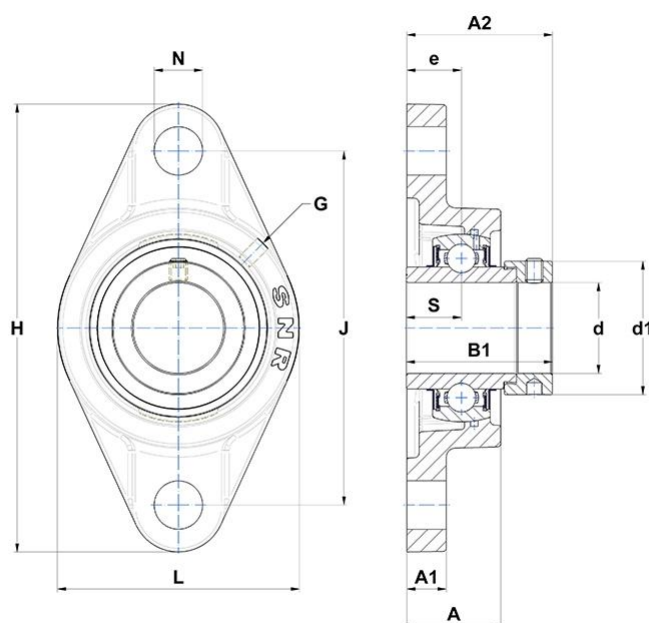

PRODUCT DEFINITION

A - Housing height	36 mm
A1 - Housing foot height / flange height	14 mm
A2 - Total height from mounting surface	55,9 mm
B - Width of Inner Ring	42,8 mm
B1 - Overall width IR (with eccent. locking collar/adapt. sleeve)	56,3 mm
d - Shaft diameter	40 mm

PRODUCT DEFINITION

d1 - Outer dia of eccent. Lock. collar / nut of adapter sleeve	58 mm
e - Distance mounting surface to bearing center	21 mm
G - Grease fitting	M6x1
H - Housing length, width or diameter	175 mm
L - Housing width / diameter	100 mm
N - Mounting hole dimension	16 mm
S - Dist. cent. of raceway to face IR on side opp. lock. device	21,4 mm
Brand	SNR

PRODUCT PERFORMANCE

C - Dynamic load rating	29,6 kN
C0 - Static load rating	18,2 kN
Operating temperature min.	-20 °C
Operating temperature max.	100 °C

OTHER FEATURES

Mass	1,62 kg
Recommended tightening torque for set screw	11.5 N-m