


Technical datasheet

NKX25

Combined bearings

Visual(s)

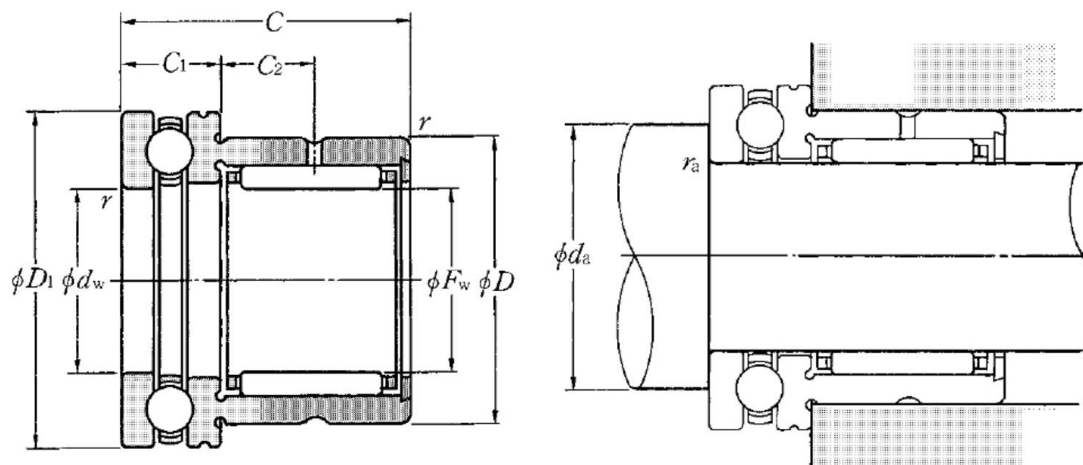

Product definition

Fw	25 mm
dw	25 mm
D	37 mm
D1	42 mm
C	30 mm
C1	11 mm
C2	9.5 mm
rs min	0.6 mm
Dw	2 mm
Dw1	6.35 mm
Lw	13.8 mm
Lubrication hole on outer ring	Oui/Yes
k	2.5 mm
Precision class	P0
Mass	0.12 kg
Brand	NTN

Product performance

Cr	14.2 kN
Ca	19.6 kN
C0r	24 kN
C0a	37 kN
Nlim (grease)	4,600 rpm
Nlim (oil)	6,500 rpm
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	120 °C

Abutment dimensions

da min	35 mm
ras max	0.6 mm