



The Timken Company

4500 Mt Pleasant St. NW


N. Canton, OH 44720

Phone: (234) 262-3000

E-Mail: CustomerCAD@timken.com • **Web site:** www.timken.com

Part Number 560, Tapered Roller Bearings - Single Cones - Imperial

This is the most basic and most widely used type of tapered roller bearing. It consists of two main separable parts: the cone (inner ring) assembly and the cup (outer ring). It is typically mounted in opposing pairs on a shaft.

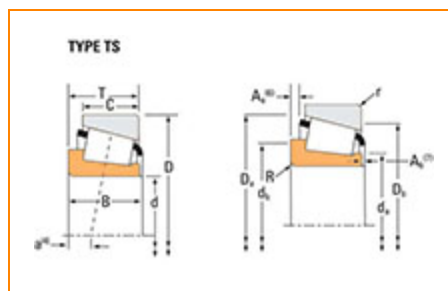

[Specifications](#) | [Dimensions](#) | [Abutment and Fillet Dimensions](#) | [Basic Load Ratings](#) | [Factors](#)

Specifications

Series	555
Cone Part Number	560
Design Units	Imperial
Cage Type	Stamped Steel
C1 - Dynamic Radial Rating (Two-Row, 1 million revolutions)¹	88500 lbf 394000 N
C90(2) - Dynamic Radial Rating (Two-Row, 90 million revolutions)²	22900 lbf 102000 N

Dimensions

d - Bore	2.6250 in 66.675 mm
B - Cone Width	1.4440 in 36.678 mm

Abutment and Fillet Dimensions

R - Cone Backface "To Clear" Radius³	0.14 in 3.600 mm
da - Cone Frontface Backing Diameter	3.03 in 77 mm
db - Cone Backface Backing Diameter	3.31 in 84 mm
Ab - Cage-Cone Frontface Clearance	0.08 in 2 mm
Aa - Cage-Cone Backface Clearance	0.07 in 1.8 mm
a - Effective Center Location⁴	-0.37 in -9.4 mm

Basic Load Ratings

C90 - Dynamic Radial Rating (90 million revolutions)⁵	13200 lbf 58600 N
C1 - Dynamic Radial Rating (1 million revolutions)⁶	50800 lbf 226000 N
C0 - Static Radial Rating	55700 lbf 248000 N
C_{a90} - Dynamic Thrust Rating (90 million revolutions)⁷	7810 lbf 34700 N

Factors

K - Factor⁸	1.69
G1 - Heat Generation Factor (Roller-Raceway)	91
G2 - Heat Generation Factor (Rib-Roller End)	21.1
Cg - Geometry Factor⁹	0.111

¹ Based on 1×10^6 revolutions L_{10} life, for the ISO life calculation method.

² Based on 90×10^6 revolutions L_{10} life, for The Timken Company life calculation method. C_{90} and C_{a90} are radial and thrust values for a single-row, $C_{90(2)}$ is the two-row radial value.

³ These maximum fillet radii will be cleared by the bearing corners.

⁴ Negative value indicates effective center inside cone backface.


⁵ Based on 90×10^6 revolutions L_{10} life, for The Timken Company life calculation method. C_{90} and C_{a90} are radial and thrust values.

⁶ Based on 1×10^6 revolutions L_{10} life, for the ISO life calculation method.

⁷ Based on 90×10^6 revolutions L_{10} life, for The Timken Company life calculation method. C_{90} and C_{a90} are radial and thrust values for a single-row, $C_{90(2)}$ is the two-row radial value.

⁸ These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.

⁹ Geometry constant for Lubrication Life Adjustment Factor a_3 .

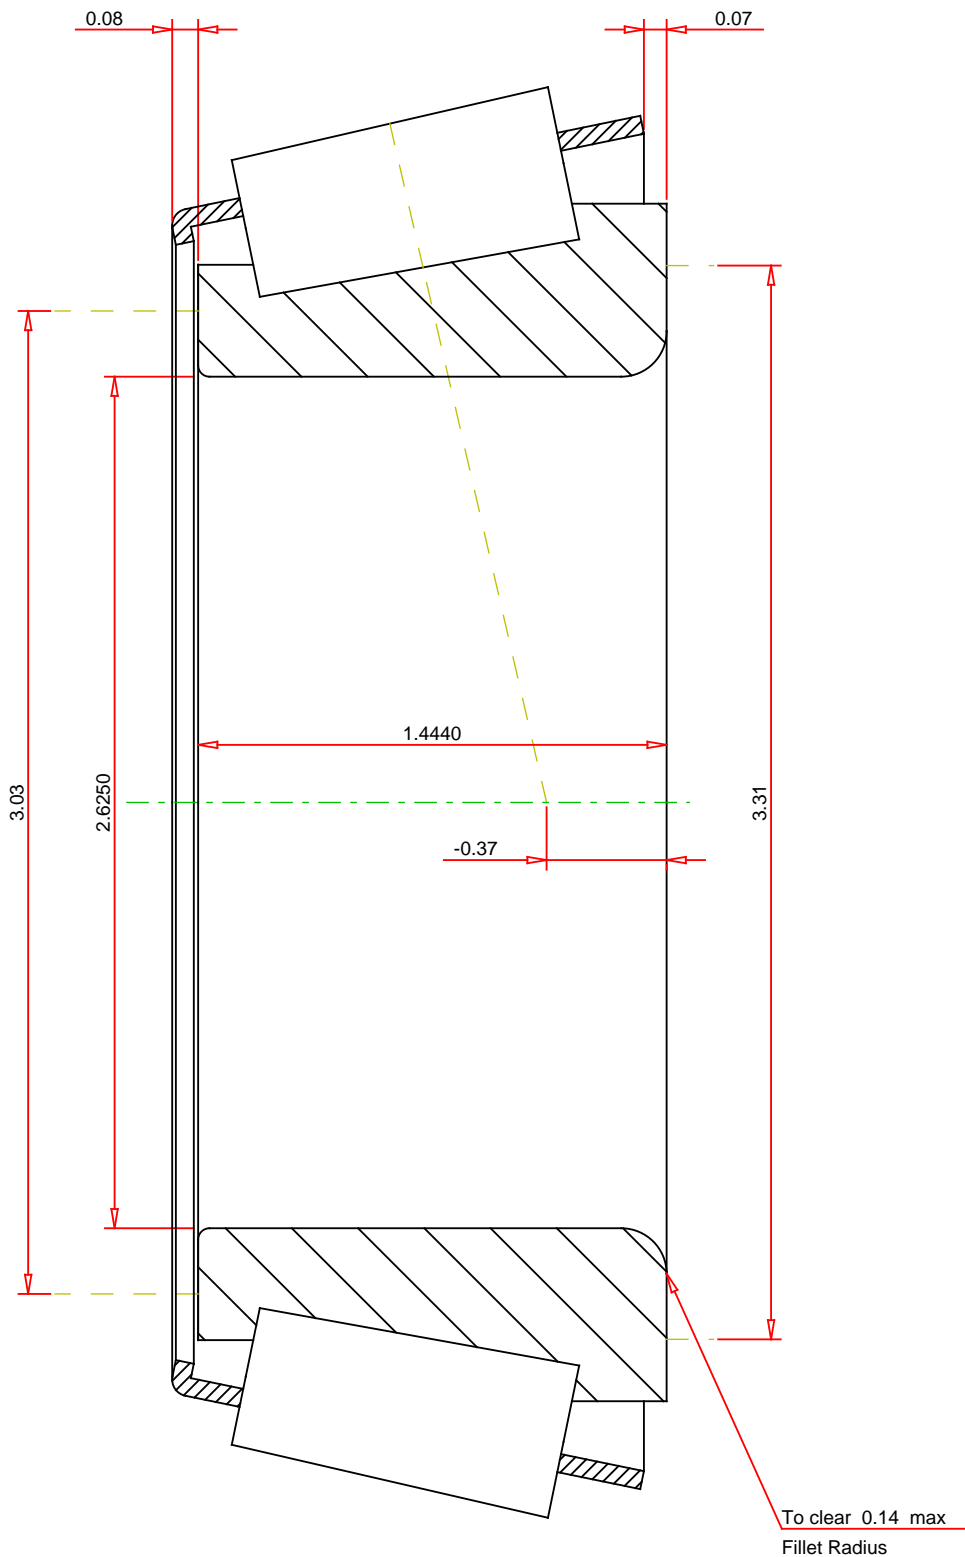

IMPERIAL UNITS

Number of Rollers Per Row 19

TIMKEN®

THE TIMKEN COMPANY
NORTH CANTON, OHIO USA

560
SINGLE TAPERED CONE

K Factor	1.69
Dynamic Radial Rating - C90	13200 lbf
Dynamic Thrust Rating - Ca90	7810 lbf
Dynamic Radial Rating - C1	50800 lbf

Every reasonable effort has been made to ensure the accuracy of the information contained in this writing, but no liability is accepted for errors, omissions or for any other reason.

FOR DISCUSSION ONLY