




TRAFIMET® A101

100A @ 60% Duty Cycle, EN60974-7



PIN CONFIGURATION

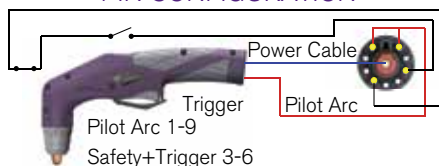

ALTERNATIVE PIN CONFIGURATIONS AVAILABLE

See pages 285 for more information.

CONSUMABLES

1	CV09	Long Contact Cutting Attachment
2	CV08	Contact Cutting Attachment
3	CV23	Contact Cutting Attachment
4	CV11	Stand Off Guide
5	CV12	Two Pins Crown Shield
6	CV14	Four Pins Crown Shield
7	CV21	Carriage
8	PC113	Contact Cutting Nozzle
	PC130	Contact Cutting Nozzle Long Life
9	PC109	Outside Nozzle
	PC111	Heavy Duty Nozzle

TORCH MODEL

STOCK CODE	REFERENCE	DESCRIPTION	TERMINATION
XTA101-6-M4	PA1450	Torch x 6m Composite Cable	M14
XTA101-6-CC	PA1452	Torch x 6m Coaxial Cable	Central Connector
XTA101-6-14	PA1454	Torch x 6m Composite Cable	1/4" BSP

TECHNICAL DATA

Voltage Class	M	Duty Cycle 60%	100A
Standard Length	6m	Duty Cycle 100%	75A
Air Consumption	180 l/min	Start Method	HF Ignition – Pilot Arc
Air Pressure	5 Bar		

CONSUMABLES

10	PD117-14	Long Cutting Tip 1.4mm
	PD117-17	Long Cutting Tip 1.7mm
	PD117-19	Long Cutting Tip 1.9mm
11	PD111	Long Cutting Tip 1.0mm
12	PD101-11	Cutting Tip 1.1mm
	PD101-14	Cutting Tip 1.4mm
	PD101-17	Cutting Tip 1.7mm
13	PE103	Air Diffuser

CONSUMABLES

14	PE101	Air Diffuser
15	PR116	Long Electrode
16	PR101	Electrode
17	FH562	Diffuser
18	PWPF145	Torch Head c/w FH562 Diffuser
19	EA131	O' Ring
20	PWTP110	Handle c/w Trigger
21	FH297	Insulator Washer

Trafimet® trademark is the property of its respective owner, and usage is for reference only. These products are not endorsed by the original manufacturer.