




Technical data

EX212G2

Insert bearings

Spherical outer diameter, fixing by eccentric locking collar, seal with slinger

VISUAL (S)

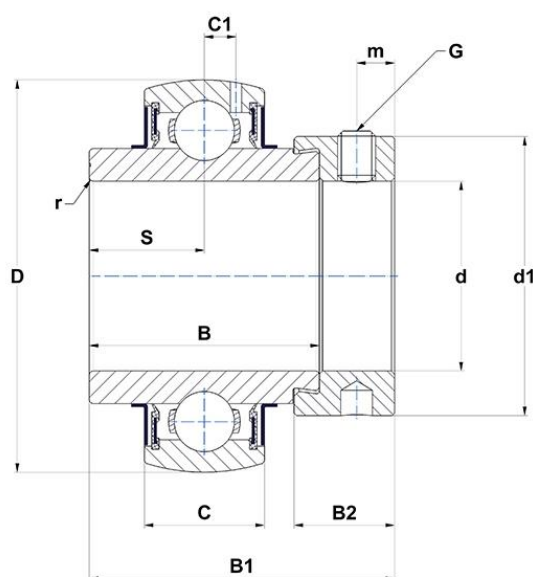

PRODUCT DIMENSIONS

B - Width of Inner Ring	61,8 mm
B1 - Overall width IR (with eccent. locking collar/adapt. sleeve)	77,7 mm
B2 - Width of eccent. Lock. collar/nut+washer of adapter sleeve	22,3 mm
C - Width of Outer Ring	27 mm
C1 - Distance center of OR to center of lubrication zone	8,2 mm
d - Shaft diameter	60 mm
d1 - Outer dia of eccent. Lock. collar / nut of adapter sleeve	82 mm
D - Outer diameter of OR	110 mm

PRODUCT DIMENSIONS

G - Set screw size	M10x1,25
m - Distance to set screw	8 mm
r - Radius Inner Ring	1.5
S - Dist. cent. of raceway to face IR on side opp. lock. device	30,9 mm
SW - Wrench size	5 mm
Brand	SNR

PRODUCT PERFORMANCE

C - Dynamic load rating	52,5 kN
C0 - Static load rating	32,8 kN
Operating temperature min.	-20 °C
Operating temperature max.	100 °C

OTHER FEATURES

Mass	1,87 kg
Recommended tightening torque for set screw	22 N-m