


Stainless One-touch Fittings

Series KG

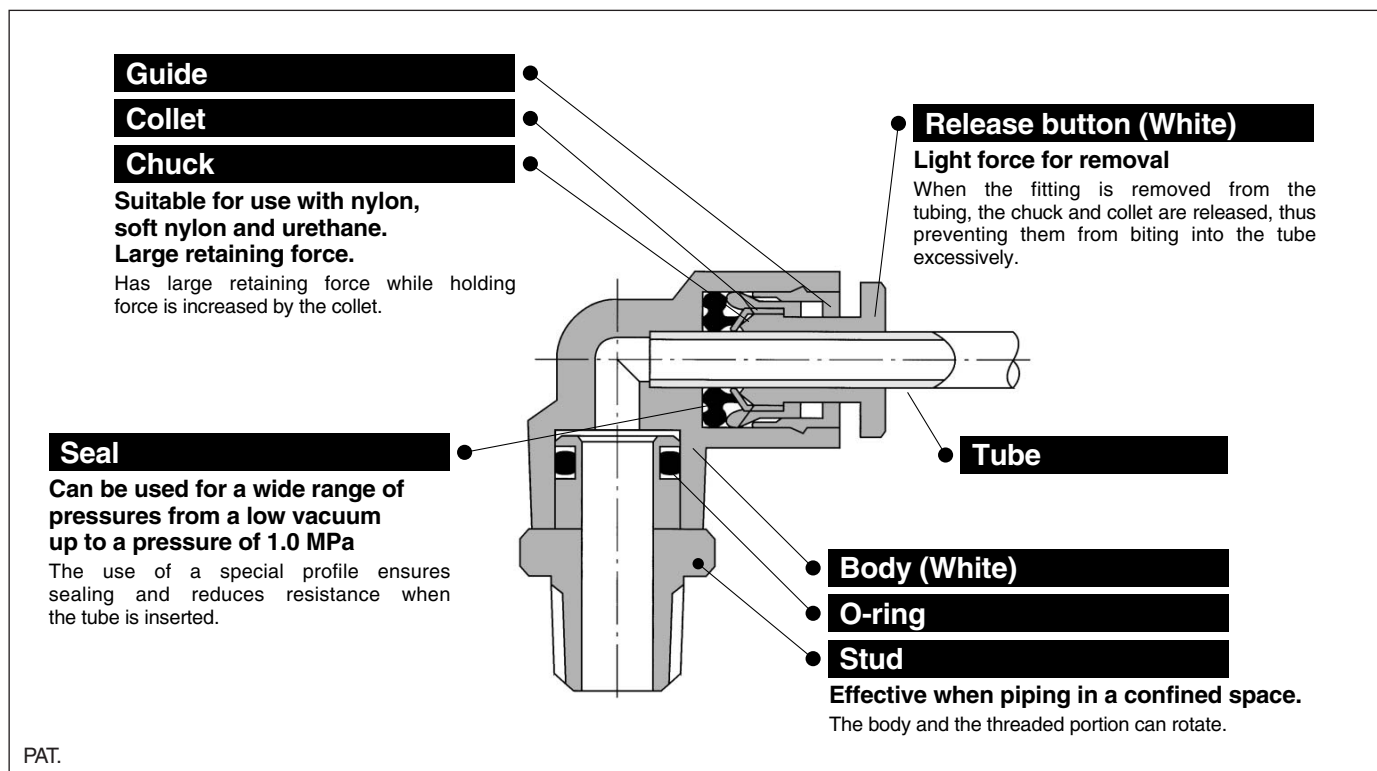

Stainless specifications applicable to corrosive environments

Stainless steel 303 adopted for metal elements

Suitable for use in CRT production lines where contact with copper must be avoided, food processing machines where water or salt water splashes and clean room where discoloration of copper material and corrosion must be avoided.



Applicable Tubing

Tubing material	Nylon, Soft nylon, Polyurethane
Tubing O.D.	ø4, ø6, ø8, ø10, ø12, ø16

Specifications

Fluid	Air/Water ⁽¹⁾	
Maximum operating pressure	1.0 MPa	
Operating vacuum pressure	-100 kPa	
Proof pressure	3.0 MPa	
Ambient and fluid temperature	-5 to 60°C (Water: 0 to 40°C) (No freezing)	
Thread	Mounting section	JIS B 0203 (Taper thread for piping)
	Nut section	JIS B 0211 Class 2 (Metric fine thread)
Seal (Thread portion)	With seal or none ⁽²⁾	

Note 1) Applicable for general industrial water. Please consult with SMC if using for other kinds of fluid.
Also, the surge pressure must be under the maximum operating pressure.


Note 2) Suffix "S" to the part number, if w/ seal is desired.

Principal Parts Material

Body	Stainless steel 303, PBT
Stud	Stainless steel 303
Chuck	Stainless steel 304
Guide	Stainless steel 304, Stainless steel 303, POM
Collet, Release button	POM
Seal, O-ring	NBR



Different Diameter Tee: KGT

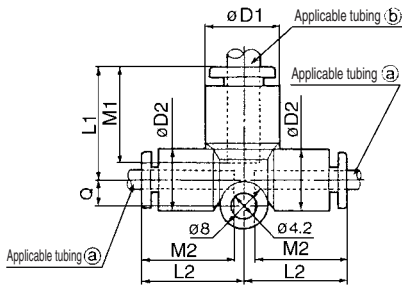


Applicable tubing O.D. (mm)		Model	Note) $\phi D1$	$\phi D2$	L1	L2	Q	M1	M2	Effective area (mm ²)		Weight (g)
(a)	(b)									Nylon	Urethane	
4	6	KGT04-06	12.8	10.4	19.5	18	4.5	17	16	7.1	6.5	5
6	8	KGT06-08	15.2	12.8	22.5	20	5.3	18.5	17	16.4	16.4	8
8	10	KGT08-10	18.5	15.2	26.5	23	6	21	18.5	36	27.2	14
10	12	KGT10-12	20.9	18.5	28.5	26.5	6.8	22	21	56	44.5	21


Note) $\phi D1$: Max. diameter

Male Run Tee: KGY

<M5>

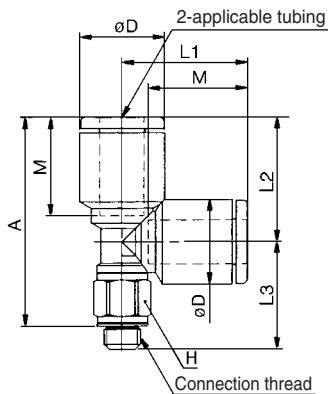

<R>

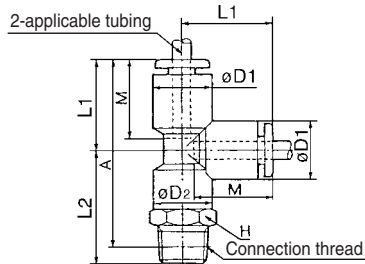


Applicable tubing O.D. (mm)	Connection thread R	Model	H (width across flats)	Note) $\phi D1$	$\phi D2$	L1	L2	L3	A*	M	Effective area (mm ²)		Weight (g)
											Nylon	Urethane	
4	M5 x 0.8	KGY04-M5	7	9.5	—	16	13.5	15	25.5	13	4.6	4.6	3.5
	1/8	KGY04-01	10	10.4	10	18	22	—	36	16	6.4	4.4	13
	1/4	KGY04-02	14	—	—	—	26	—	38	—	—	—	19
6	M5 x 0.8	KGY06-M5	7	11.5	—	17.5	14.5	17.5	29	14	4.6	4.6	4.3
	1/8	KGY06-01	10	—	—	—	23	—	39	—	—	—	12
	1/4	KGY06-02	14	12.8	10	20	27	—	41	17	13.4	10.6	20
	3/8	KGY06-03	17	—	—	—	29	—	42.5	—	—	—	34
8	1/8	KGY08-01	12	—	—	—	24.5	—	43.5	17	13.4	10.6	14
	1/4	KGY08-02	14	15.2	12	23	28.5	—	45.5	18.5	25.6	17.7	22
	3/8	KGY08-03	17	—	—	—	30.5	—	47	—	—	—	36
10	1/8	KGY10-01	—	—	—	—	27	—	49.5	—	—	—	31
	1/4	KGY10-02	17	18.5	17	26.5	30	—	50.5	21	40.0	28.4	29
	3/8	KGY10-03	—	—	—	—	32	—	52	—	—	—	39
	1/2	KGY10-04	22	—	—	—	36	—	54.5	—	—	—	66
12	1/4	KGY12-02	—	—	—	—	31	—	53.5	—	—	—	31
	3/8	KGY12-03	17	20.9	17	28.5	33	—	55	22	57.4	45.4	41
	1/2	KGY12-04	22	—	—	—	37	—	57.5	—	—	—	68
16	3/8	KGY16-03	—	—	—	—	38	—	65.5	25	81	(81)	112
	1/2	KGY16-04	22	26.5	20.9	34	41	—	67	—	113	(113)	116


* Reference dimensions after R thread installation.
Note 1) $\phi D1$: Max. diameter
Note 2) (): Values for nylon.

Male Delta Union: KGD

<M5>

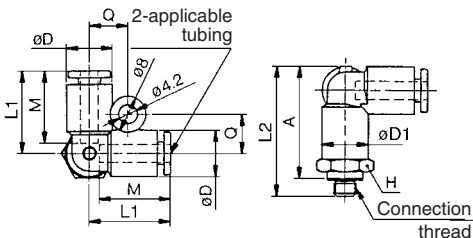

<R>

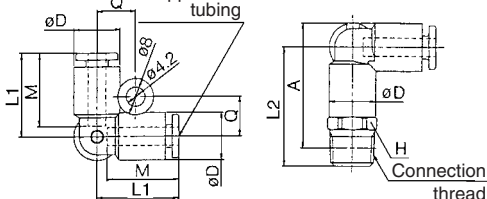

Applicable tubing O.D. (mm)	Connection thread R	Model	H (width across flats)	Note) ϕD	L1	L2	A*	M	Q	Effective area (mm ²)		Weight (g)
										Nylon	Urethane	
4	M5 x 0.8	KGD04-M5	11	10.4	18.5	24	25.5	16	8.7	4.3	4.3	10
	1/8	KGD04-01	—	—	—	26.5	27.5	—	—	6.0	6.0	12
	1/4	KGD04-02	14	—	—	30.5	30	—	—	—	—	21
6	M5 x 0.8	KGD06-M5	13	12.8	20.5	26	28.5	17	9.9	4.3	4.3	12
	1/8	KGD06-01	—	—	—	29	31.5	—	—	13.9	11.0	14
	1/4	KGD06-02	14	—	—	32.5	33	—	—	—	—	21
	3/8	KGD06-03	17	—	—	34.5	34.5	—	—	—	—	34
8	1/8	KGD08-01	—	—	—	33.5	37	—	—	—	—	26
	1/4	KGD08-02	17	15.2	23.5	36.5	38	18.5	11.1	26.3	18.2	35
	3/8	KGD08-03	—	—	—	37.5	38.5	—	—	—	—	39
10	1/4	KGD10-02	19	18.5	26.5	39.5	43	21	12.8	40.8	29.0	40
	3/8	KGD10-03	—	—	—	40.5	43.5	—	—	—	—	62
	1/2	KGD10-04	22	—	—	44	45	—	—	—	—	62
12	1/4	KGD12-02	—	—	—	42	46.5	—	—	—	—	55
	3/8	KGD12-03	22	20.9	28.5	43	47	22	13.9	57.2	45.2	56
	1/2	KGD12-04	—	—	—	46	48.5	—	—	—	—	63

* Reference dimensions after R thread installation.
Note) ϕD : Max. diameter