


NSYTRV42PE

Lineryg earth terminal block - 4mm² single-level
1x1 screw - green-yellow

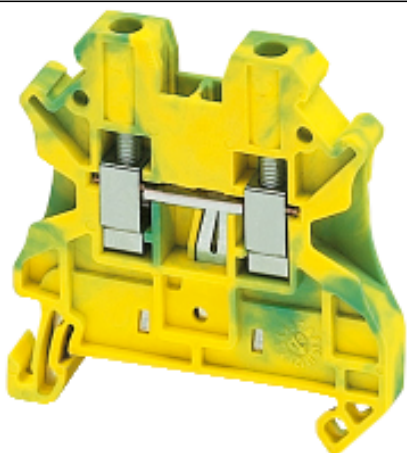

Main

Range of product	Lineryg
Range	Lineryg
Product name	Lineryg TR
Product or component type	Terminal block
Device short name	TRV
Terminal block type	Protective earth
Terminal block level	1
Mounting mode	Clip-on
Nominal cross section	4 mm ²
Length	47.7 mm
Colour	Green-yellow
Quantity per set	Set of 50

Complementary

Width	6.2 mm
Height	47.5 mm
Connections - terminals	1 x screw terminal : upstream 1 x screw terminal : downstream
Number of terminals	2
Connection position	Sideways
Number of measurement input	2
Cable cross section	0.14...6 mm ² , flexible without 0.14...6 mm ² , solid
Tightening torque	0.6...0.8 N.m
Wire stripping length	9 mm
Tool type	Disconnection : screwdriver Connection : screwdriver
Material	Polyamide 6/6 (insulating case)

Dielectric loss	0.01 at 1 MHz conforming to IEC 60250 0.01 at 1 MHz conforming to VDE 0303-T4
Dielectric constant	3.7 at 1 MHz
Resistivity	10000 MΩ.m conforming to VDE 0303-T30 10000 MΩ.m conforming to IEC 60093
Surface resistance	1000 GΩ conforming to VDE 0303-T30 1000 GΩ conforming to IEC 60093
Creep resistance	500 CTI (> 400 kV) conforming to VDE 0303-T30 500 CTI (> 400 kV) conforming to IEC 60093
Flame retardance	V0, thickness 0.8 mm conforming to UL 94
Product weight	13.38 g
Range compatibility	Prisma - Pack Spacial Pragma Prisma - G Prisma - PH Prisma - P TeSys Kaedra
Product compatibility	Spacial enclosures
Compatibility code	Terminal block

Environment

Product certifications	LR GL DNV CSA cURus ATEX VDE IEC-Ex EAC
Dielectric strength	1000 V conforming to IEC 60243-1
Ambient air temperature for operation	-40...130 °C conforming to IEC 60216-1 -40...130 °C conforming to VDE 0304-T21

Offer Sustainability

Sustainable offer status	Green Premium product
RoHS (date code: YYWW)	Compliant - since 1052 - Schneider Electric declaration of conformity Schneider Electric declaration of conformity
REACH	Reference not containing SVHC above the threshold Reference not containing SVHC above the threshold
Product environmental profile	Available Product environmental
Product end of life instructions	Need no specific recycling operations

Contractual warranty

Warranty period	18 months
-----------------	-----------