



Technical data

ESFLE203


Bearing units

Grey cast housing, radial insert ball bearing with eccentric locking collar, single lip seal

KIT CONTENT

ES203G2, FLE203

VISUAL (S)

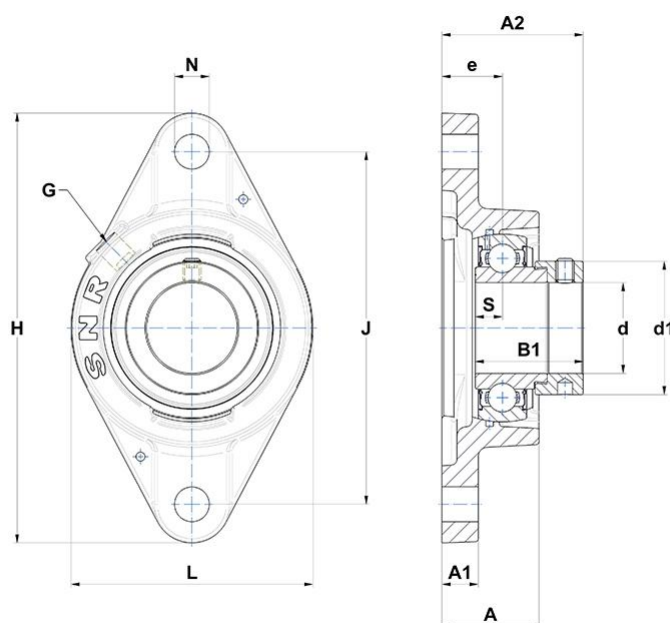

PRODUCT DEFINITION

A - Housing height	26 mm
A1 - Housing foot height / flange height	9,5 mm
A2 - Total height from mounting surface	39,1 mm
B - Width of Inner Ring	19,1 mm
B1 - Overall width IR (with eccent. locking collar/adapt. sleeve)	28,6 mm
d - Shaft diameter	17 mm

PRODUCT DEFINITION

d1 - Outer dia of eccent. Lock. collar / nut of adapter sleeve	27,2 mm
e - Distance mounting surface to bearing center	17 mm
G - Grease fitting	M6
H - Housing length, width or diameter	99 mm
J - Mounting holes distance	76,5 mm
L - Housing width / diameter	57 mm
N - Mounting hole dimension	11,5 mm
S - Dist. cent. of raceway to face IR on side opp. lock. device	6,5 mm
Brand	SNR

PRODUCT PERFORMANCE

C - Dynamic load rating	9,55 kN
C0 - Static load rating	4,78 kN
Operating temperature min.	-20 °C
Operating temperature max.	100 °C

OTHER FEATURES

Mass	0,39 kg
Recommended tightening torque for set screw	5.5 N-m