


Self-Lube® pressed steel rubber mounted pillow block units
(zinc plated housings)
LPBR Series**

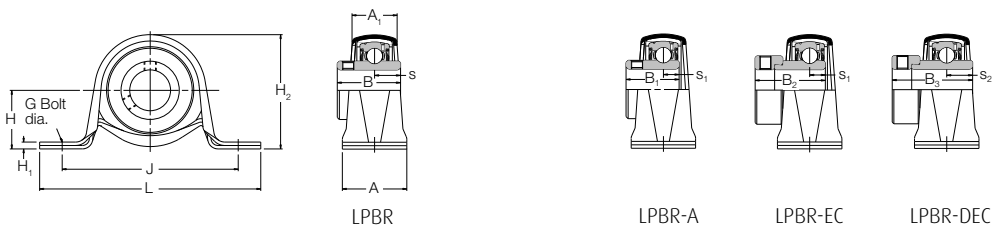

Shaft diameter		RHP designation				Basic bearing insert	Casting group	Dimensions (mm)				
mm	inches							L	H	H ₁	H ₂	J
12		LPBR12		LPBR12EC		1017	2	98.4	25.4	2.4	49.9	76.0
15		LPBR15		LPBR15EC								
16		LPBR16		LPBR16EC								
17		LPBR17		LPBR17EC								
	½	LPBR½		LPBR½EC								
	⅝	LPBR⅝		LPBR⅝EC								
20		LPBR20	LPBR20A	LPBR20EC	LPBR20DEC	1020	3	108.0	28.6	2.8	55.8	86.0
	¾	LPBR¾	LPBR¾A	LPBR¾EC	LPBR¾DEC							
25		LPBR25	LPBR25A	LPBR25EC	LPBR25DEC	1025	4	117.5	33.3	3.6	65.7	95.0
	⅞	LPBR⅞		LPBR⅞EC	LPBR⅞DEC							
	15/16	LPBR15/16		LPBR15/16EC	LPBR15/16DEC							
	1	LPBR1	LPBR1A	LPBR1EC	LPBR1DEC							
30		LPBR30	LPBR30A	LPBR30EC	LPBR30DEC	1030	5	128.6	39.7	4.4	77.5	106.0
	1⅛	LPBR1⅛		LPBR1⅛EC	LPBR1⅛DEC							
	1⅜	LPBR1⅜		LPBR1⅜EC	LPBR1⅜DEC							
	1¼	LPBR1¼	LPBR1¼A	LPBR1¼EC	LPBR1¼DEC							

Please check availability

**Note: These units are not re-greaseable

Dimensions (mm)										Max. radial housing load	Rec. max. speed	Mass (approx.)
G	A	A ₁	B	B ₁	B ₂	B ₃	s	s ₁	s ₂	newtons	rev/min	kg
8	31.7	21.6	27.38	–	28.63	–	11.58	6.53	–	890	3000	0.2
10	31.7	21.6	31.00	25.80	31.03	43.73	12.73	7.53	17.13	1110	3000	0.3
10	37.5	25.5	34.10	27.30	31.03	44.43	14.33	7.53	17.53	1330	2500	0.5
10	41.0	28.4	38.10	31.20	35.73	48.43	15.93	9.03	18.33	1560	2500	0.9