



Technical data

USPFL205


Bearing units

Sheet metal housing, radial insert ball bearing with socket set screws, single lip seal

KIT CONTENT

US205G2, PFL205

VISUAL (S)

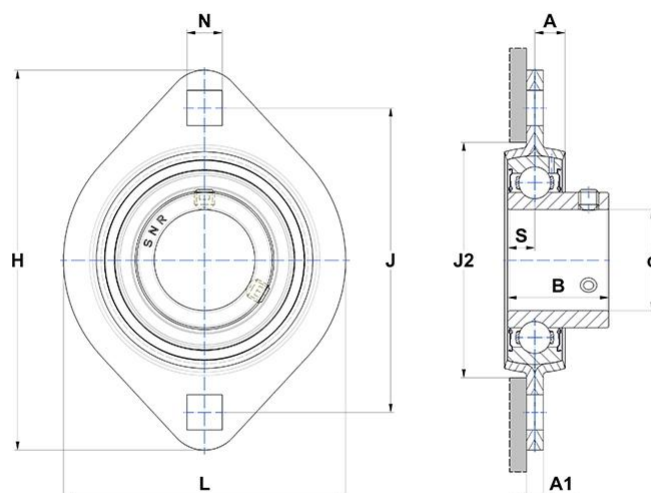

PRODUCT DIMENSIONS

A - Housing height	8,7 mm
A1 - Housing foot height / flange height	4 mm
A2 - Total height from mounting surface	19,5 mm
B - Width of Inner Ring	27 mm
d - Shaft diameter	25 mm
H - Housing length, width or diameter	95,2 mm

PRODUCT DIMENSIONS

J - Mounting holes distance	76,2 mm
L - Housing width / diameter	71 mm
N - Mounting hole dimension	8,7 mm
S - Dist. cent. of raceway to face IR on side opp. lock. device	7,5 mm
Brand	SNR

PRODUCT PERFORMANCE

C - Dynamic load rating	14 kN
C0 - Static load rating	7,88 kN
Operating temperature min.	-20 °C
Operating temperature max.	100 °C

OTHER FEATURES

Mass	0,27 kg
Recommended tightening torque for set screw	5.5 N-m