

16A 3P+N+E 415V Coupler IP44

Product Ref: **CXN165P415C**


Technical Features:

- Manufactured from thermoplastic - suitable for general use
- Quick release feature
- Fast and simple assembly and wiring, cuts time and costs
- Ergonomic grip
- Corrosion and impact resistant
- Colour coded for fast identification of operating voltage
- Safe and reliable
- Typical operating temperature -25°C to +50°C
- Screwless cable grip



Product Specification

Voltage Rating	415V
Current Rating	16A
IP Rating	IP44
Weight	0.186kg
Frequency	50Hz
Number of Poles	3P+N+E
Mounting	Trailing
Cable Entry	Compression Gland
Colour	Red
Material	Thermoplastic
Compliance	UKCA, CE
Guarantee	1 Year
Standards	IEC 60309-1/2
Diameter Ø	64.5mm
Height	90mm
Length	147mm

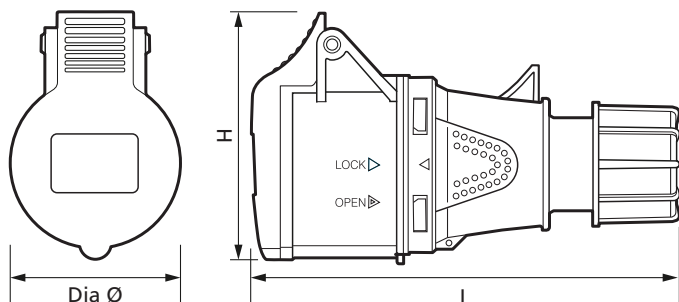

Errors and omissions excepted (E&OE). All information is subject to change without notice and is correct at the time of print. Refer to issue number and date below.

Tel: +44 (0)1302 342 642 • mcg.co.uk • [@mcg_industrial](https://twitter.com/mcg_industrial)