


NSYTRV352

Linery passthrough terminal block - 35mm² 125A
single-level 1x1 screw - grey

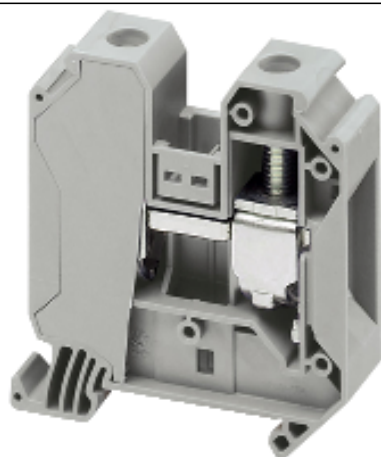

Main

Range of product	Linery
Range	Linery
Product name	Linery TR
Product or component type	Terminal block
Device short name	TRV
Terminal block type	Passthrough
Terminal block level	1
Mounting mode	Clip-on
Nominal cross section	35 mm ²
Length	60.2 mm
Colour	Grey
Quantity per set	Set of 50

Complementary

Width	16 mm
Height	65.7 mm
Connections - terminals	1 x screw terminal : upstream 1 x screw terminal : downstream
Number of terminals	2
Connection position	Sideways
Number of measurement input	2
Cable cross section	1.5...50 mm ² , solid 1.5...50 mm ² , flexible without
Tightening torque	3.2...3.7 N.m
Wire stripping length	18 mm
Tool type	Connection : screwdriver Disconnection : screwdriver
[Ue] rated operational voltage	600 V cURus 1000 V conforming to EN/IEC 60947-7-1

	600 V CSA 690 V conforming to ATEX Exe II Ex II 2 GD
[Ie] rated operational current	125 A conforming to EN/IEC 60947-7-1 150 A cURus 150 A CSA 126 A conforming to ATEX Exe II Ex II 2 GD
Material	Polyamide 6/6 (insulating case)
Dielectric loss	0.01 at 1 MHz conforming to IEC 60250 0.01 at 1 MHz conforming to VDE 0303-T4
Dielectric constant	3.7 at 1 MHz
Resistivity	10000 MΩ.m conforming to VDE 0303-T30 10000 MΩ.m conforming to IEC 60093
Surface resistance	1000 GΩ conforming to VDE 0303-T30 1000 GΩ conforming to IEC 60093
Creep resistance	500 CTI (> 400 kV) conforming to VDE 0303-T30 500 CTI (> 400 kV) conforming to IEC 60093
Flame retardance	V0, thickness 0.8 mm conforming to UL 94
Product weight	61 g
Range compatibility	Prisma - P Prisma - PH Spacial Prisma - Pack TeSys Prisma - G Kaedra Pragma
Product compatibility	Spacial enclosures
Compatibility code	Terminal block

Environment

Product certifications	VDE IEC-Ex GL CSA EAC ATEX cURus
Dielectric strength	1000 V conforming to IEC 60243-1
Ambient air temperature for operation	-40...130 °C conforming to IEC 60216-1 -40...130 °C conforming to VDE 0304-T21

Offer Sustainability

Sustainable offer status	Green Premium product
RoHS (date code: YYWW)	Compliant - since 1052 - Schneider Electric declaration of conformity  Schneider Electric declaration of conformity
REACH	Reference not containing SVHC above the threshold Reference not containing SVHC above the threshold
Product environmental profile	Available
Product end of life instructions	Need no specific recycling operations

Contractual warranty

Warranty period	18 months
-----------------	-----------