



Technical data

EXFC206


Bearing units

Grey cast housing, radial insert ball bearing with eccentric locking collar, seal with slinger

KIT CONTENT

EX206G2, FC206

VISUAL (S)

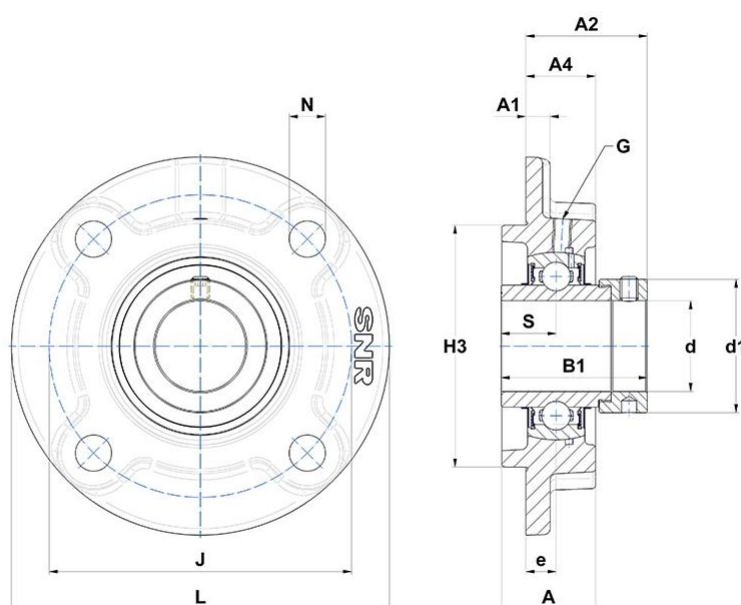

PRODUCT DEFINITION

A - Housing height	31 mm
A1 - Housing foot height / flange height	8 mm
A2 - Total height from mounting surface	40,1 mm
A4 - Housing height from mounting surface	23 mm
B - Width of Inner Ring	36,4 mm
B1 - Overall width IR (with eccent. locking collar/adapt. sleeve)	48,3 mm

PRODUCT DEFINITION

d - Shaft diameter	30 mm
d1 - Outer dia of eccent. Lock. collar / nut of adapter sleeve	44,1 mm
e - Distance mounting surface to bearing center	10 mm
G - Grease fitting	M6x1
H3 - Centering dia	80 mm
J - Mounting holes distance	100 mm
L - Housing width / diameter	125 mm
N - Mounting hole dimension	12 mm
S - Dist. cent. of raceway to face IR on side opp. lock. device	18,2 mm
Brand	SNR

PRODUCT PERFORMANCE

C - Dynamic load rating	19,5 kN
C0 - Static load rating	11,2 kN
Operating temperature min.	-20 °C
Operating temperature max.	100 °C

OTHER FEATURES

Mass	1,37 kg
Recommended tightening torque for set screw	11.5 N-m