




New!

Miller® Kernmantel lanyards range

Ultra-resistant – New design – Complete range – Edge tested products

The Miller Safety at Height portfolio of products is extended with a new range of kernmantel lanyards combining restraint (EN354, EN358) and fall arrest edge tested (EN355) solutions. This optimised range of Miller® kernmantel lanyards is highly abrasion resistant and has a coordinated new design. These new products are ideal in the following sectors: construction, general industry and utilities.

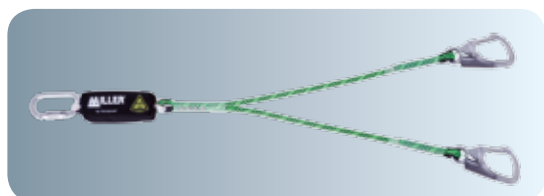

Features and benefits:

Ultra-resistant: a durable and 'edge tested' product.

Workers at height who are at risk of falling over an edge (scaffolding, roofs, terraces...) should always choose an edge tested fall arrester.

An edge resistant lanyard:

Our new kernmantel lanyard range is cut resistant and has been edge tested to guarantee a safer work environment on edges ($r \geq 0.5\text{mm}$): Compliant to VG11 PPE 11.074*, you can rest assured that these lanyards deliver greater safety should a fall occur over a horizontal edge where rope abrasion may be a factor. This provides a greater safety in case of horizontal application where the risk of fall over an edge is high.

These new lanyards are also suitable for other work at height situations.

More durable lanyard:

Manufactured from high quality Kernmantel ropes, these new lanyards have been submitted to abrasion tests which demonstrate that the new Miller kernmantel lanyards are 2 times more abrasion resistant than a standard rope.

A new design for increased work safety :

The new design of Miller lanyards now provides improved identification and categorisation.

- 1 **Easily identifiable from a distance:** light green rope with black stripes enables supervisors to check that operators are using the correct lanyard type for their work environment.
- 2 **Facilitates the pre-use safety check:** stitches highly visible (multicolor).



A wide range of products for every worker's situation:

This new range of Miller kernmantel lanyards offers a wide range to choose from. What ever the work situation, there is a lanyard to suit your needs with more than 80 options available.

- 4 lanyard variants: single and twin restraint lanyards, single and twin energy absorbing lanyards
- Rope lengths: 1m, 1.5m, 2m
- Various karabiners (screw, twist, triple, double action) in different opening (from 18mm to 110mm) and materials (steel or aluminium).



Edge tested



* Specific test over an edge requirement, equivalent to a standard, set up by a coordination of notified bodies.

Restraint lanyards

Single lanyards Reference	Length			User connector		Anchorage connector	
	1m	1.5m	2m	Thimble only	Karabiner	Thimble only	Karabiner
1032330*	0.8m			X		X	
1032331*		1.3m		X		X	
1032332*			1.8m	X		X	
1032336	X				B		B
1032337		X			B		B
1032340*		X			B		C
1032341*			X		B		C
1032342	X				F		G
1032343		X			F		G
1032345*	X				F		E
1032346*		X			F		E
1032402*	X				D		G
1032403*		X			D		G

Twin lanyards Reference	Length			User connector		Anchorage connector	
	1m	1.5m	2m	Thimble only	Karabiner	Thimble only	Karabiner
1032351*	X				B		C
1032352*		X			B		C
1032354*	X				F		H
1032355*		X			F		H
1032357*	X				F		G
1032358*		X			F		G
1032360*	X				F		E
1032361*		X			F		E
1032406*	X				D		G
1032407*		X			D		G

Edge shock absorbing lanyards

Single lanyards Reference	Length			User connector		Anchorage connector	
	1m	1.5m	2m	Thimble only	Karabiner	Thimble only	Karabiner
1032363*	0.8m			X		X	
1032364*		1.3m		X		X	
1032365*			1.8m	X		X	
1032366	X				A		A
1032367		X			A		A
1032368			X		A		A
1032371			X		B		B
1032372*	X				B		C
1032373*		X			B		C
1032374*			X		B		C
1032376*		X			F		H
1032377*			X		F		H
1032378*	X				F		G
1032379*		X			F		G
1032380*			X		F		G
1032381*	X				F		E
1032382*		X			F		E
1032383*			X		F		E
1032409*			X		D		D
1032411*			X		D		G

*Products in stock

Non exhaustive list. Other models are available. Please consult us for further options.

FOR TECHNICAL QUESTIONS: TECHNISERV NORTHERN EUROPE

Phone: +49 (0) 23 01-96 29 219
or +49 (0) 23 01-96 29 220
Email: techniservnorth.hsp@honeywell.com

HONEYWELL SAFETY PRODUCTS

UNITED KINGDOM:
HONEYWELL SAFETY PRODUCTS (UK) LTD
Phone: +44 (0) 1256 693 200 - Fax: +44 (0) 1256 693 300
Email: info-uk.hsp@honeywell.com

EXPORT:
Phone: +33 (0)1 49 90 79 79 - Fax : +33 (0)1 49 90 71 04
Email: info-export.hsp@honeywell.com




www.honeywellsafety.com









by Honeywell

Twin lanyards Reference	Length			User connector		Anchorage connector	
	1m	1.5m	2m	Thimble only	Karabiner	Thimble only	Karabiner
1032387*	X				B		C
1032388*		X			B		C
1032390*	X				F		H
1032391*		X			F		H
1032393*	X				F		G
1032394*		X			F		G
1032396*	X				F		E
1032397*		X			F		E
1032412*		X			D		G
1032414*		X			D		I

Steel karabiners

1018960	A	Screw gate CS20	
1018963	B	Twist lock CS20	
1009249	C	Scaf hook G055	

Aluminium karabiners

1028630	D	Triple action Cigale	
1006452	E	Snap hook	
1008342	F	Twist lock Zicral	
1018977	G	Scaf hook ML04/G065	
1018972	H	Double action G060	
1018976	I	Scaf hook G0100	

DOC3559
10/2013
© 2013 Honeywell International Inc.

Lead them to safety — Build an enduring culture of safety where employees make safe choices on their own: <http://honeywellsafety.com>

Honeywell