



Technical data

UKP207-19H


Bearing units

Grey cast housing, radial insert ball bearing with adapter sleeve, seal with slinger

KIT CONTENT

UK207G2H-19, P207

VISUAL (S)

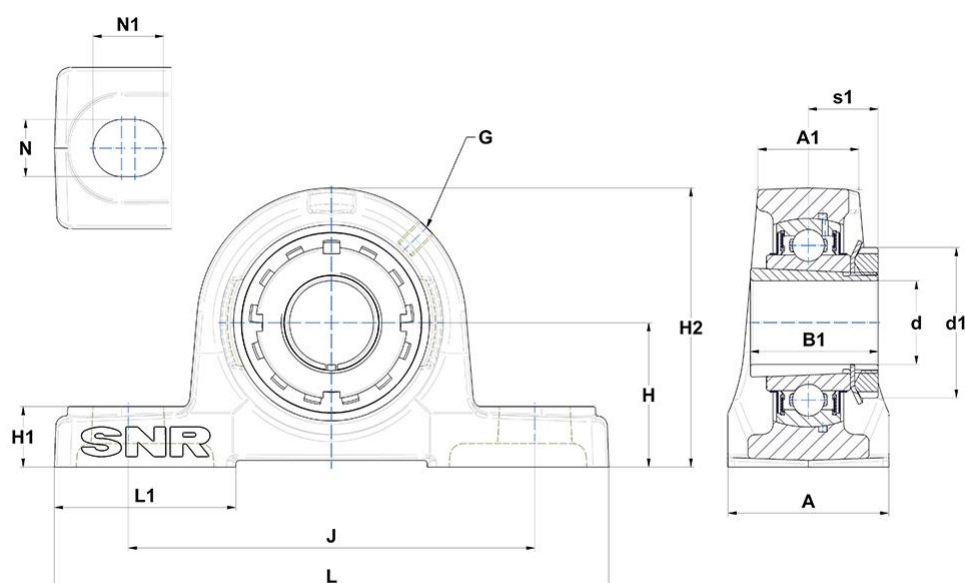

PRODUCT DIMENSIONS

A - Housing width	48 mm
A1 - Housing top width	31 mm
B - Width of Inner Ring	27 mm
d - Shaft diameter	30,163 mm
d1 - Outer dia of eccent. Lock. collar / nut of adapter sleeve	52 mm
G - Grease fitting	M6x1

PRODUCT DIMENSIONS

H - Distance mounting base to centerline spheric. seating diam.	47,6 mm
H1 - Housing foot height	19 mm
H2 - Housing height	94 mm
J - Mounting holes distance	127 mm
L - Housing length	167 mm
L1 - Housing foot length	54 mm
N - Mounting hole dimension	17 mm
N1 - Mounting hole length	21 mm
s1 - Distance nut to middle of bearing raceway	22,5 mm
Brand	SNR

PRODUCT PERFORMANCE

C - Dynamic load rating	25,7 kN
C0 - Static load rating	15,2 kN
Operating temperature min.	-20 °C
Operating temperature max.	100 °C

OTHER FEATURES

Mass	1,73 kg
Adapter sleeve reference	H2307-19