




FAG

32307-A
Tapered roller bearing

Schaeffler ID:
0167129430000

Tapered roller bearings 323, main dimensions to DIN ISO 355 / DIN 720, separable, adjusted or in pairs

Technical information

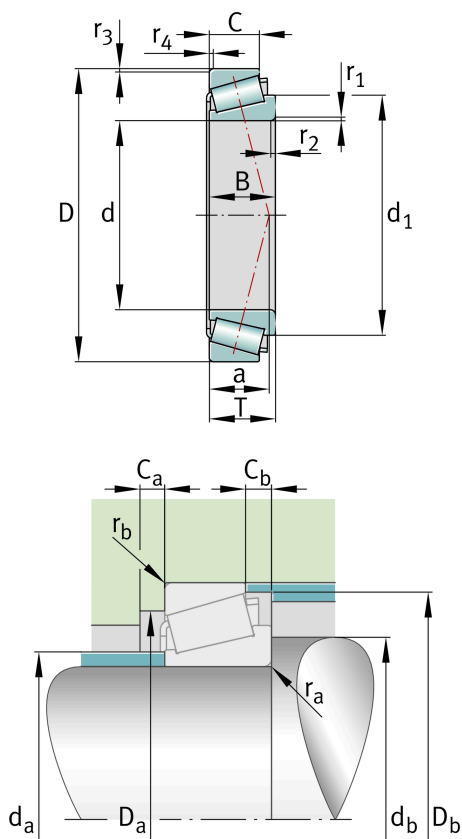

Main Dimensions & Performance Data

d	35 mm	Bore diameter
D	80 mm	Outside diameter
B	31 mm	Width, inner ring
C	25 mm	Width, outer ring
T	32.75 mm	Width, total
C _r	100,000 N	Basic dynamic load rating, radial
C _{0r}	113,000 N	Basic static load rating, radial
C _{ur}	13,800 N	Fatigue load limit, radial
n _G	9,400 1/min	Limiting speed
n _{gr}	6,500 1/min	Thermal speed rating
	0.747 kg	{Weight}

Mounting dimensions

d _{a max}	44 mm	Maximum diameter of shaft shoulder
d _{b min}	44 mm	Minimum diameter of shaft shoulder
D _{a min}	66 mm	Minimum diameter of housing shoulder
D _{a max}	71 mm	Maximum diameter of housing shoulder
D _{b min}	74 mm	Minimum diameter of housing shoulder
C _{a min}	4 mm	Minimum axial space
C _{b min}	7.5 mm	Minimum axial space
r _{a max}	2 mm	Maximum fillet radius of shaft
r _{b max}	1.5 mm	Maximum fillet radius of housing

Dimensions

r _{1, 2 min}	2 mm	Minimum chamfer dimension of inner ring back face
r _{3, 4 min}	1.5 mm	Minimum chamfer dimension of outer ring back face
a	20 mm	Distance between the apexes of the pressure cones
d ₁	56.1 mm	Guidance rib diameter of inner ring

Temperature range

T _{min}	-30 °C	Operating temperature min.
T _{max}	120 °C	Operating temperature max.

Calculation factors

e	0.32	Limiting value of Fa/Fr for the applicability of diff. Values of factors X and Y
Y	1.9	Dynamic axial load factor
Y ₀	1.05	Static axial load factor

Additional information

T2FE035	Comparative designation to ISO 10317 and ISO 355
---------	--