



Technical data

UKP216H


Bearing units

Grey cast housing, radial insert ball bearing with adapter sleeve, seal with slinger

KIT CONTENT

UK216G2H, P216

VISUAL (S)

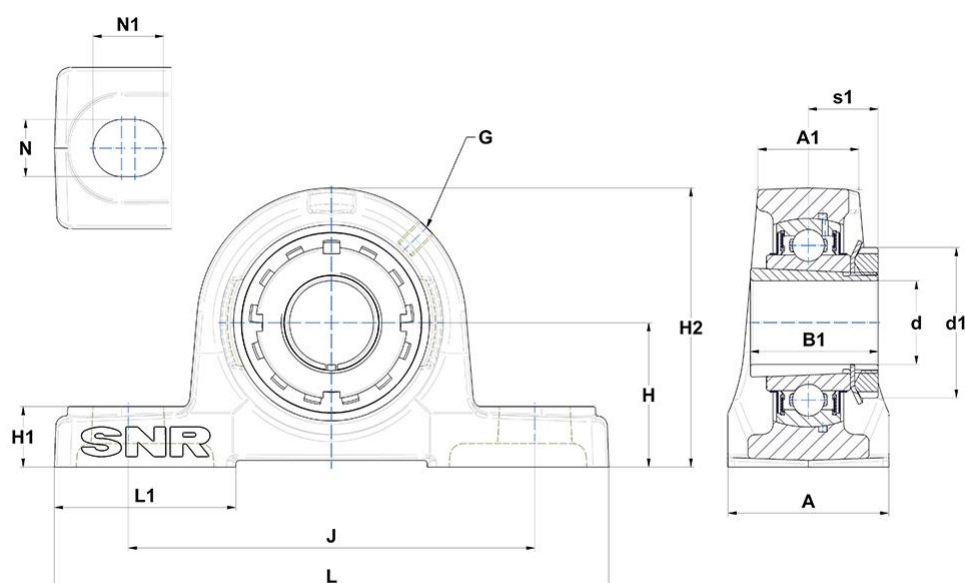

PRODUCT DIMENSIONS

A - Housing width	78 mm
A1 - Housing top width	51 mm
B - Width of Inner Ring	44 mm
d - Shaft diameter	70 mm
d1 - Outer dia of eccent. Lock. collar / nut of adapter sleeve	105 mm
G - Grease fitting	M10x1

PRODUCT DIMENSIONS

H - Distance mounting base to centerline spheric. seating diam.	88,9 mm
H1 - Housing foot height	30 mm
H2 - Housing height	175 mm
J - Mounting holes distance	232 mm
L - Housing length	292 mm
L1 - Housing foot length	91 mm
N - Mounting hole dimension	25 mm
N1 - Mounting hole length	31 mm
s1 - Distance nut to middle of bearing raceway	39 mm
Brand	SNR

PRODUCT PERFORMANCE

C - Dynamic load rating	72,5 kN
C0 - Static load rating	54,2 kN
Operating temperature min.	-20 °C
Operating temperature max.	100 °C

OTHER FEATURES

Mass	9,44 kg
Adapter sleeve reference	H2316