


# D-sub Connector Series SV



## How to Order Manifold

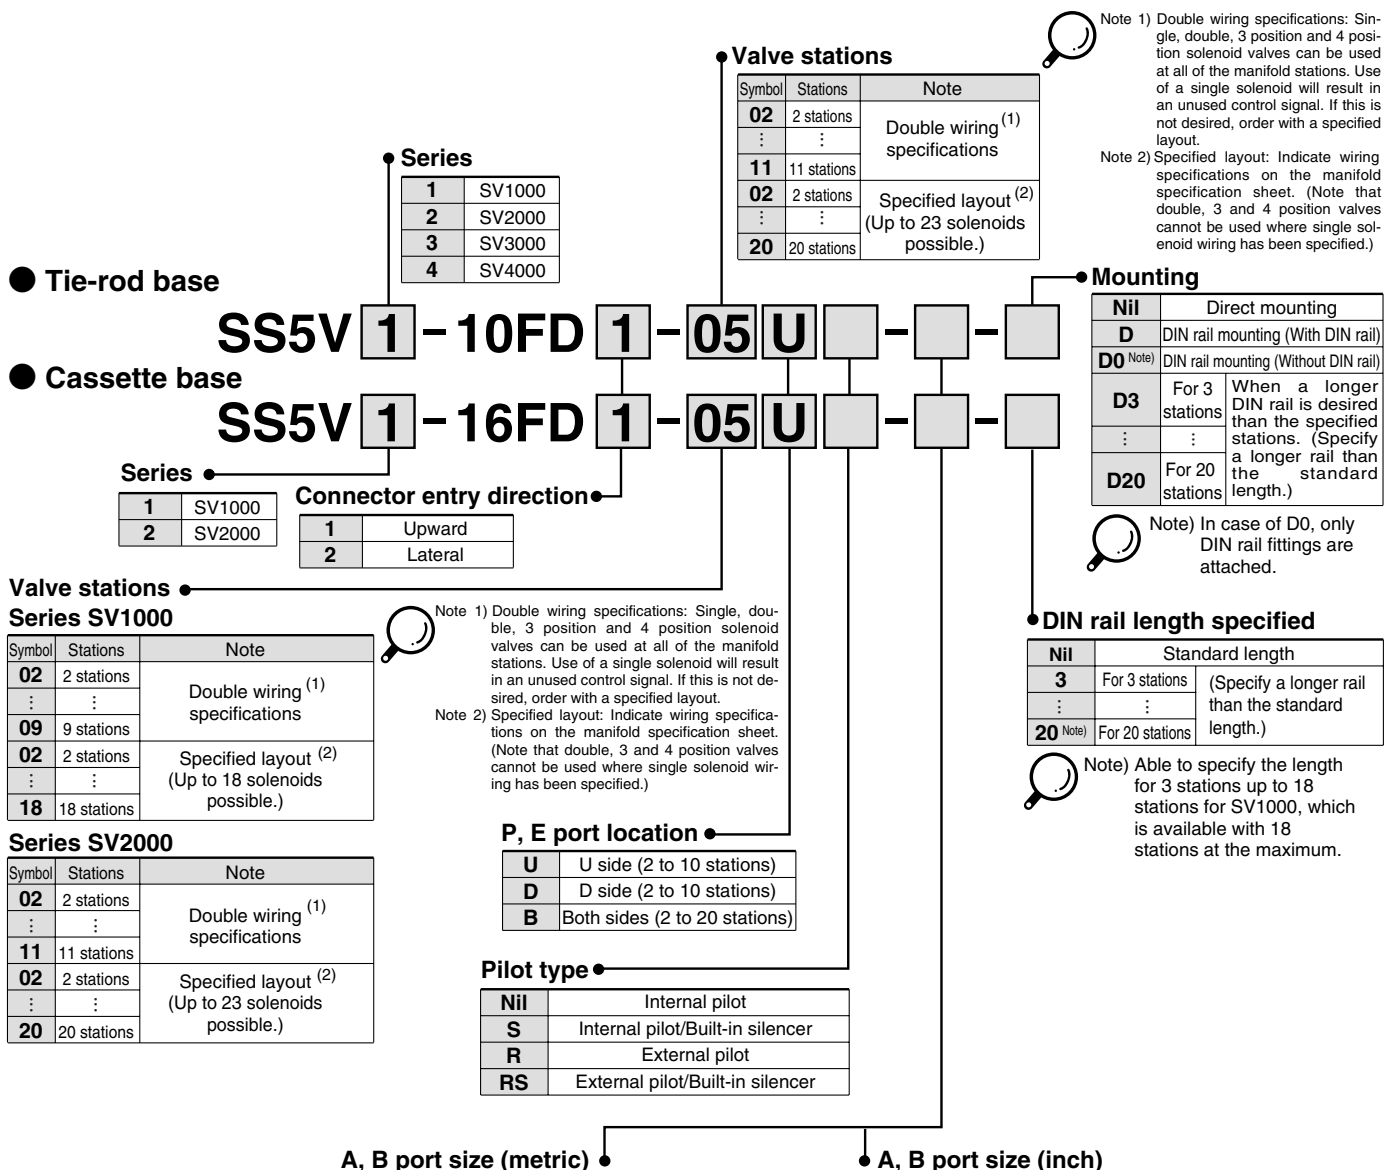

### A, B port size (metric)

Symbol	A, B port	P, E port	Applicable series
<b>C3</b>	One-touch fitting for ø3.2	One-touch fitting for ø8	SV1000
<b>C4</b>	One-touch fitting for ø4		
<b>C6</b>	One-touch fitting for ø6		
<b>C4</b>	One-touch fitting for ø4	One-touch fitting for ø10	SV2000
<b>C6</b>	One-touch fitting for ø6		
<b>C8</b>	One-touch fitting for ø8		
<b>C6</b>	One-touch fitting for ø6	One-touch fitting for ø12	SV3000
<b>C8</b>	One-touch fitting for ø8		
<b>C10</b>	One-touch fitting for ø10		
<b>C8</b>	One-touch fitting for ø8	One-touch fitting for ø12	SV4000
<b>C10</b>	One-touch fitting for ø10		
<b>C12</b>	One-touch fitting for ø12		
<b>02</b>	Rc 1/4	Rc 3/8	SV4000
<b>03</b>	Rc 3/8		
<b>02F</b>	G 1/4	G 3/8	
<b>03F</b>	G 3/8		
<b>M</b>	A, B ports mixed		

### A, B port size (inch)

Symbol	A, B port	P, E port	Applicable series
N1	One-touch fitting for ø1/8"	One-touch fitting for ø5/16"	SV1000
N3	One-touch fitting for ø5/32"		
N7	One-touch fitting for ø1/4"	One-touch fitting for ø3/8"	SV2000
N3	One-touch fitting for ø5/32"		
N7	One-touch fitting for ø1/4"	One-touch fitting for ø3/8"	SV3000
N9	One-touch fitting for ø5/16"		
N9	One-touch fitting for ø5/16"	One-touch fitting for ø3/8"	SV4000
N11	One-touch fitting for ø3/8"		
N9	One-touch fitting for ø5/16"	One-touch fitting for ø3/8"	SV4000
N11	One-touch fitting for ø3/8"		
02N	NPT 1/4	NPT 3/8	SV4000
03N	NPT 3/8		
02T	NPTF 1/4	NPTF 3/8	SV4000
03T	NPTF 3/8		
M	A, B ports mixed		

\* In the case of mixed specifications (M), indicate separately on the manifold specification sheet.


\* Port sizes of X, PE port for external pilot specifications (R, RS) are ø4 (metric), ø5/32" (inch) for SV1000/2000 and ø6 (metric) and ø1/4" (inch) for SV3000/4000.

Dimensions: Series SV1000 for D-sub Connector

● Tie-rod base manifold: SS5V1-10FD<sub>2</sub> - Stations  $\begin{matrix} \text{U} \\ \text{D} \\ \text{B} \end{matrix}$  (S, R, RS)-  $\begin{matrix} \text{C3, N1} \\ \text{C4, N3} \\ \text{C6, N7} \end{matrix}$  (-D)

- When P, E port outlets are indicated on the U side or D side, the P, E ports on the opposite side are plugged.
- External pilot port positions and silencer discharge port positions are the same as P, E port outlet positions.

With External Pilot Specifications

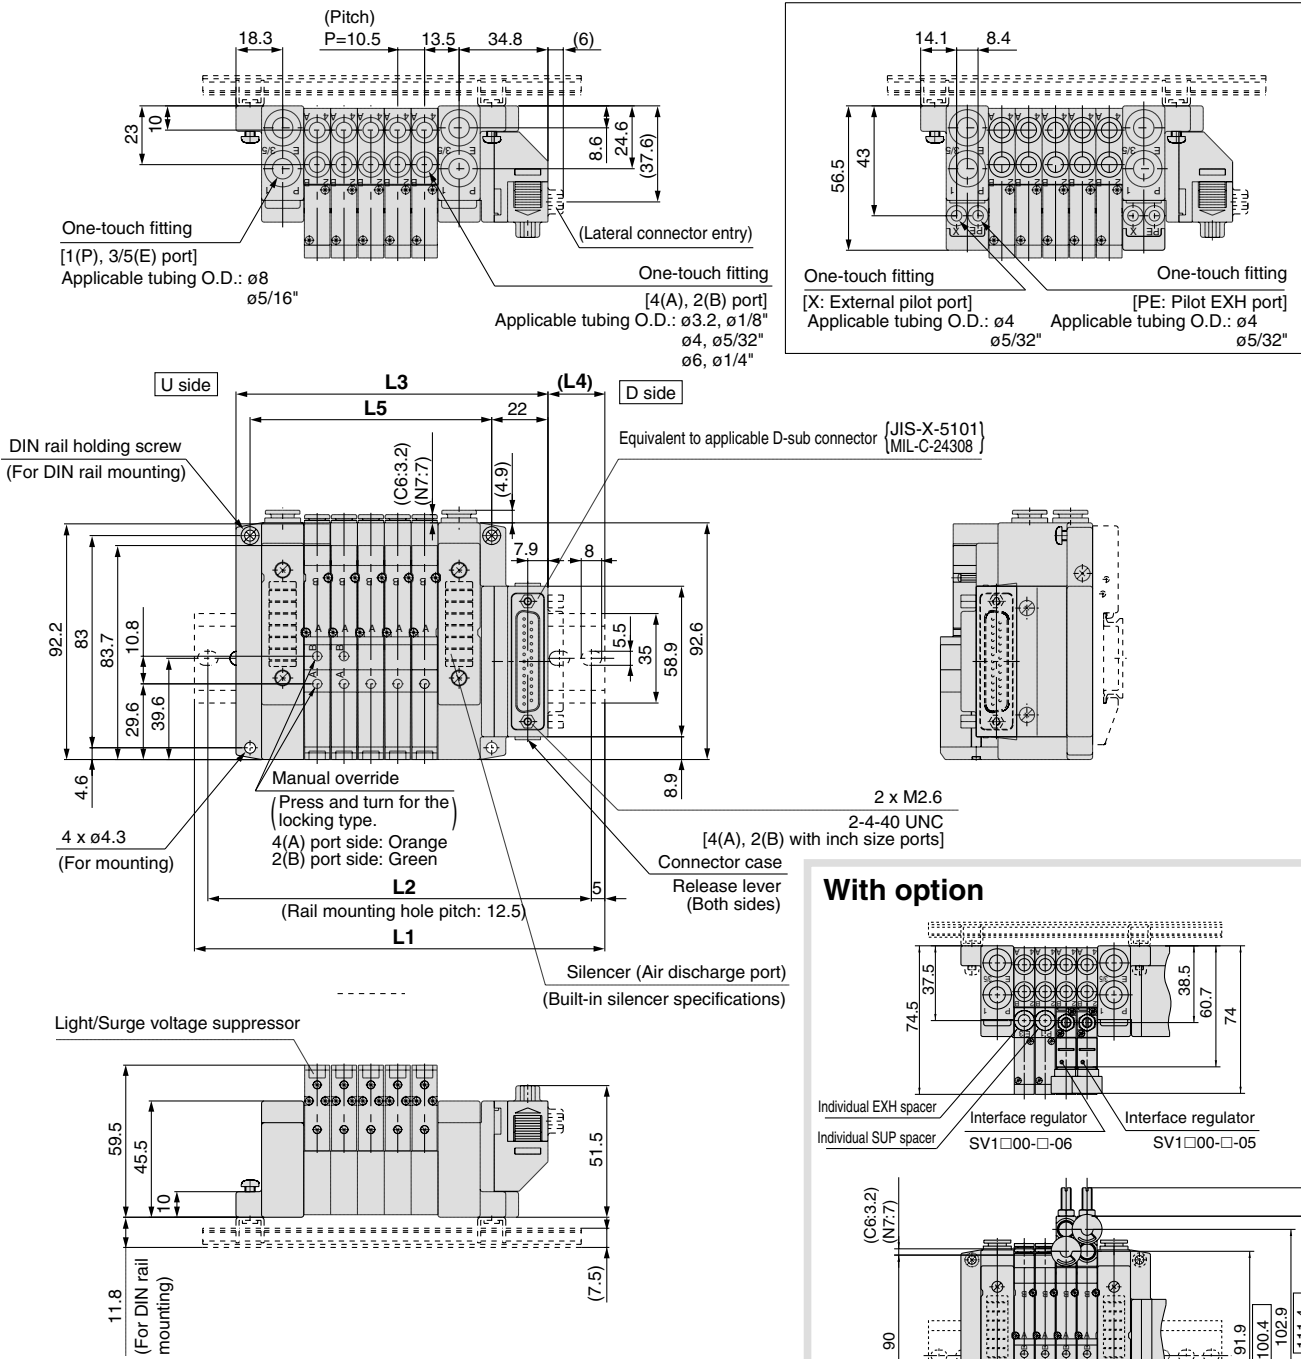

L Dimension

L \ n	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
L1	123	135.5	148	160.5	173	173	185.5	198	210.5	223	235.5	235.5	248	260.5	273	285.5	298	310.5	310.5
L2	112.5	125	137.5	150	162.5	162.5	175	187.5	200	212.5	225	225	237.5	250	262.5	275	287.5	300	300
L3	90.5	101	111.5	122	132.5	143	153.5	164	174.5	185	195.5	206	216.5	227	237.5	248	258.5	269	279.5
L4	19.5	20.5	21.5	22.5	23.5	18	19	20	21	22	23	18	19	20	21	22	23	24	18.5
L5	63	73.5	84	94.5	105	115.5	126	136.5	147	157.5	168	178.9	189	199.5	210	220.5	231	241.5	252