




Technical datasheet

N213

Single row cylindrical roller bearings

Single row cylindrical roller bearing, floating, separable, pressed steel cage

Visual(s)

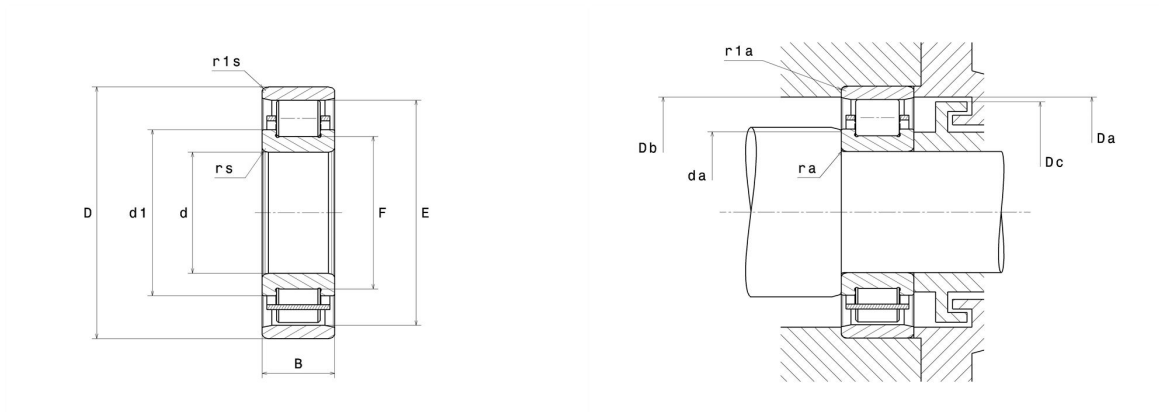

Product definition

d	65 mm
D	120 mm
B	23 mm
E	105.6 mm
F	79.6 mm
d1	84.8 mm
rs min	1.5 mm
r1s min	1.5 mm
Radial clearance class	CN
Mass (without HJ ring)	1.04 kg
Brand	NTN

Product performance

Dynamic load, C	84 kN
Static load, C0	94.5 kN
Fatigue limit load, Cu	11.5 kN
Nlim (oil)	7,000 rpm
Nlim (grease)	5,900 rpm
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	120 °C

Abutment dimensions

da min	73 mm
Da max	112 mm
Db min	108.2 mm
Dc max	104.2 mm
ra max	1.5 mm
r1a max	1.5 mm

Calculation factors

Equivalent dynamic radial load

$$P = Fr$$

Equivalent static radial load

$$Po = Fr$$