



Technical data

UCFLZ207-21T20


Bearing units

Grey cast housing, radial insert ball bearing with socket set screws, labyrinth seal, for high-temp. applications

KIT CONTENT

UC207-21G2T20, FLZ207

VISUAL (S)

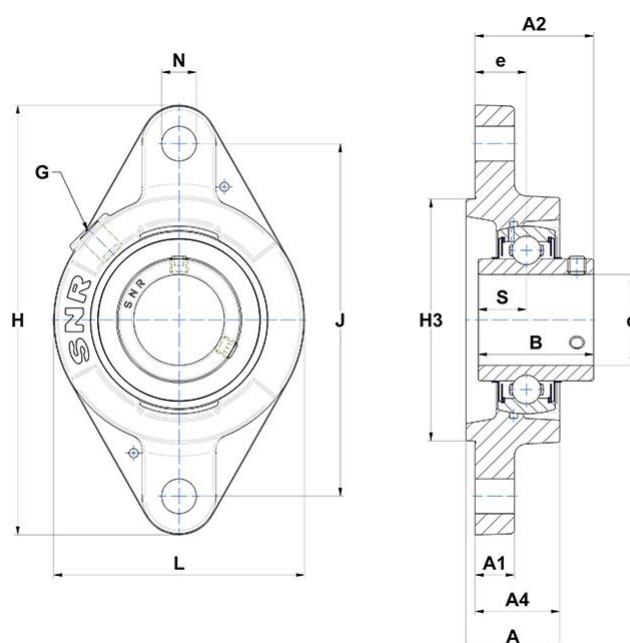

PRODUCT DIMENSIONS

A - Housing height	32,5 mm
A1 - Housing foot height / flange height	12,5 mm
A2 - Total height from mouting surface	42,4 mm
A4 - Housing height from mounting surface	28,5 mm
B - Width of Inner Ring	42,9 mm

PRODUCT DIMENSIONS

d - Shaft diameter	33,338 mm
e - Distance mounting surface to bearing center	17 mm
G - Grease fitting	R1/8"
H - Housing length, width or diameter	155 mm
H3 - Centering dia	90 mm
J - Mounting holes distance	130 mm
L - Housing width / diameter	94 mm
N - Mounting hole dimension	14 mm
S - Dist. cent. of raceway to face IR on side opp. lock. device	17,5 mm
Brand	SNR

PRODUCT PERFORMANCE

C - Dynamic load rating	25,7 kN
C0 - Static load rating	15,2 kN
Operating temperature min.	-20 °C
Operating temperature max.	200 °C

OTHER FEATURES

Mass	1,31 kg
Recommended tightening torque for set screw	8 N-m