


## Technical data

### NA2204LL/3AS

Roller follower with inner ring

## Visual(s)

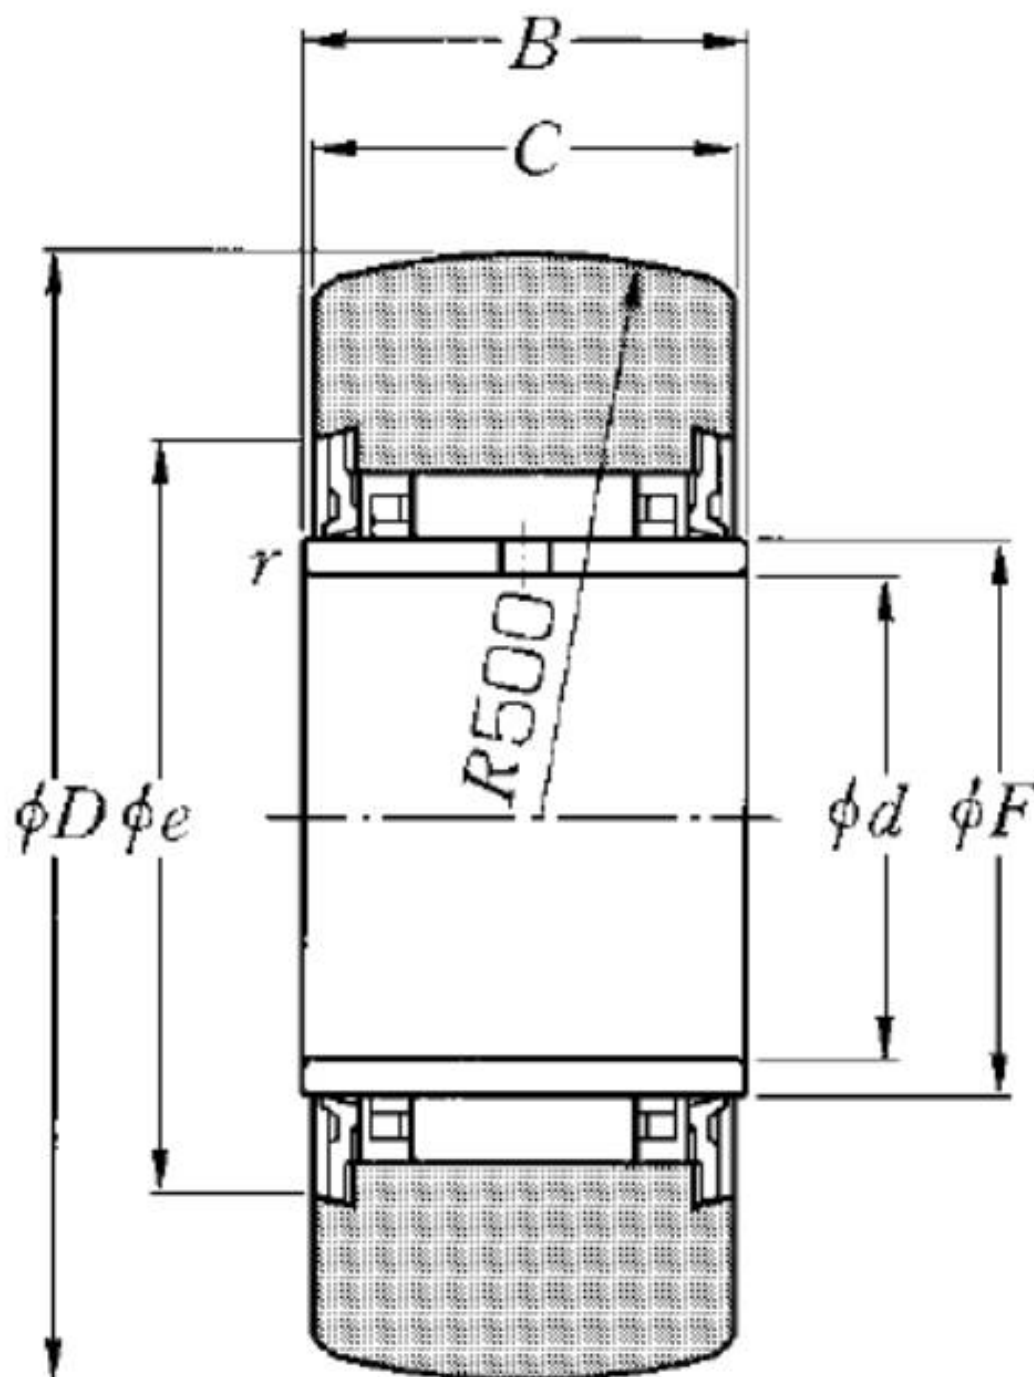

| Product definition               |         |
|----------------------------------|---------|
| <b>d</b>                         | 20 mm   |
| <b>D</b>                         | 47 mm   |
| <b>C</b>                         | 17.8 mm |
| <b>F</b>                         | 25 mm   |
| <b>B</b>                         | 18 mm   |
| <b>e</b>                         | 33 mm   |
| <b>R</b>                         | 500 mm  |
| <b>rs min</b>                    | 0.3 mm  |
| <b>Bearing with/without cage</b> | Avec    |
| <b>Radial clearance class</b>    | CN      |
| <b>Precision class</b>           | P0      |
| <b>Mass</b>                      | 0.18 kg |
| <b>Brand</b>                     | NTN     |

| Product performance                             |              |
|-------------------------------------------------|--------------|
| <b>Cr</b>                                       | 16.9 kN      |
| <b>C0r</b>                                      | 22.9 kN      |
| <b>Track load capacity spherical outer ring</b> | 4.7 kN       |
| <b>Nlim (grease)</b>                            | 6,000 Tr/min |
| <b>Min operating temperature, Tmin</b>          | -20 °C       |
| <b>Max operating temperature, Tmax</b>          | 100 °C       |