
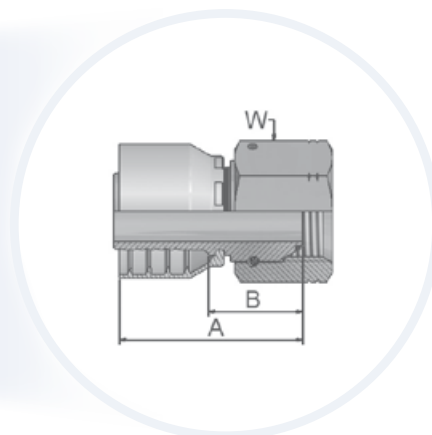


EA – BSP Swivel Female with O-ring (60° Cone)

BS 5200 – ISO 12151-6 – DKOR

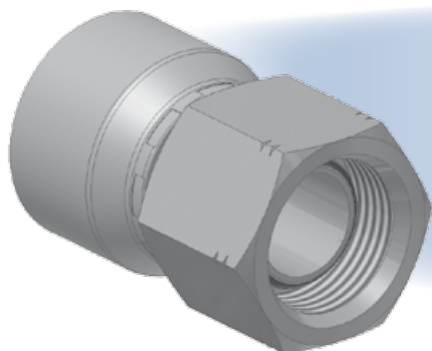

Approved fitting series for hose types:

46	441/441RH/461LT/462/462ST/463/492/492ST/692/692 TWIN
48	301SN/302/421RH/421SN/422/426/436/441/441RH/451TC/471TC/472TC/493/811/881

XXXX-XX-XX Part Number 46 48		Hose I.D. DN Inch Size mm				Thread BSP	A mm	B mm	W mm
1EA46-4-4	1EA48-4-4	6	1/4	-4	6,3	1/4x19	45	21	19
1EA46-6-4	1EA48-6-4	6	1/4	-4	6,3	3/8x19	49	26	22
1EA46-6-6	1EA48-6-6	10	3/8	-6	9,5	3/8x19	48	26	22
1EA46-8-6	1EA48-8-6	10	3/8	-6	9,5	1/2x14	51	28	27
1EA46-8-8	1EA48-8-8	12	1/2	-8	12,7	1/2x14	52	28	27
1EA46-10-10	1EA48-10-10	16	5/8	-10	15,9	5/8x14	47	21	30
1EA46-12-10	1EA48-12-10	16	5/8	-10	15,9	3/4x14	54	29	32
1EA46-12-12	1EA48-12-12	20	3/4	-12	19,1	3/4x14	50	24	32
1EA46-16-12	1EA48-16-12	20	3/4	-12	19,1	1x11	61	35	41
1EA46-16-16	1EA48-16-16	25	1	-16	25,4	1x11	62	32	41
	1EA48-20-20	32	1-1/4	-20	31,8	1-1/4x11	78	31	50

Hose fittings are delivered with ozone resistant Nitrile (NBR) O-ring as a standard version. Working temperature from -30 °C up to +105 °C.

Hose fittings with special O-rings (Viton or EPDM) available on request.

For O-ring dimensions and part-numbers see Section Eb.

Material: steel chromium(VI) free plated