




## Technical datasheet

### NU230C3

Single row cylindrical roller bearings

Single row cylindrical roller bearing, floating, separable, pressed steel cage

#### Visual(s)

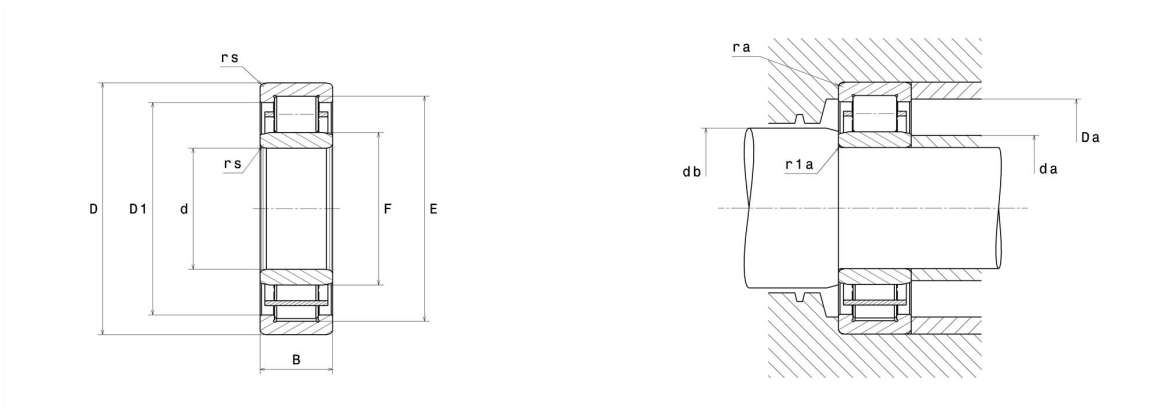

#### Product definition

|                               |         |
|-------------------------------|---------|
| <b>d</b>                      | 150 mm  |
| <b>D</b>                      | 270 mm  |
| <b>B</b>                      | 45 mm   |
| <b>E</b>                      | 238 mm  |
| <b>F</b>                      | 182 mm  |
| <b>rs min</b>                 | 3 mm    |
| <b>r1s min</b>                | 3 mm    |
| <b>Radial clearance class</b> | C3      |
| <b>Mass (without HJ ring)</b> | 10.3 kg |
| <b>Brand</b>                  | NTN     |

#### Product performance

|                                                      |           |
|------------------------------------------------------|-----------|
| <b>Dynamic load, C</b>                               | 345 kN    |
| <b>Static load, C0</b>                               | 435 kN    |
| <b>Fatigue limit load, Cu</b>                        | 42.5 kN   |
| <b>Nlim (oil)</b>                                    | 2,900 rpm |
| <b>Nlim (grease)</b>                                 | 2,500 rpm |
| <b>Min operating temperature, Tmin</b>               | -40 °C    |
| <b>Max operating temperature, Tmax</b>               | 120 °C    |
| <b>Characteristic cage frequency, FTF</b>            | 0.43 Hz   |
| <b>Characteristic rolling element frequency, BSF</b> | 7.37 Hz   |
| <b>Characteristic outer ring frequency, BPF0</b>     | 6.93 Hz   |
| <b>Characteristic inner ring frequency, BPF1</b>     | 9.07 Hz   |

## Abutment dimensions

|                |        |
|----------------|--------|
| <b>da min</b>  | 163 mm |
| <b>da max</b>  | 179 mm |
| <b>db min</b>  | 184 mm |
| <b>Da max</b>  | 257 mm |
| <b>ra max</b>  | 2.5 mm |
| <b>r1a max</b> | 2.5 mm |

## Calculation factors

Equivalent dynamic radial load

$$P = F_r$$

Equivalent static radial load

$$P_0 = F_r$$