


## Insert/shell tools

### 7370/40-2 Adaptor

- for use with insert tools with a lateral dovetail profile in torque wrenches with 14 x 18 mm internal square drives
- Caution! Modified settings on torque wrench (refer to note on p. 201)

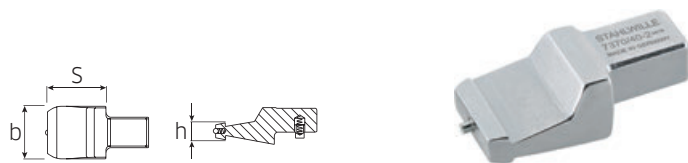

| Code        | mm    | b mm | h mm | S mm | Δg  |
|-------------|-------|------|------|------|-----|
| 58 29 00 42 | 14x18 | 31.5 | 9.5  | 34.6 | 138 |

### 1821 Tool holder


- with tool carrier to receive insert/shell tools (without torque function)



| Code        | mm    | L mm | Δg  |
|-------------|-------|------|-----|
| 18 21 00 01 | 14x18 | 575  | 720 |

### 735/65 Ratchet insert tool, fine tooth

- reversible
- 60 teeth
- load capacity up to 650 N·m
- for size 65 torque wrenches



| Code        | "   | mm    | b mm | h mm | S mm | Δg   |
|-------------|-----|-------|------|------|------|------|
| 58 25 10 65 | 3/4 | 22x28 | 61   | 35   | 55   | 1115 |

### 735/100 Ratchet insert tool

- with push through square drive
- 30 teeth




| Code        | "   | mm    | b mm | h mm | S mm | Δg   |
|-------------|-----|-------|------|------|------|------|
| 58 25 01 00 | 3/4 | 22x28 | 76   | 42   | 55   | 1893 |

### 734/100 Square drive insert tool




| Code        | "   | mm    | b mm | h mm | S mm | Δg   |
|-------------|-----|-------|------|------|------|------|
| 58 24 01 00 | 3/4 | 22x28 | 43   | 42   | 55   | 1175 |

### 731/100 Open ended insert tools

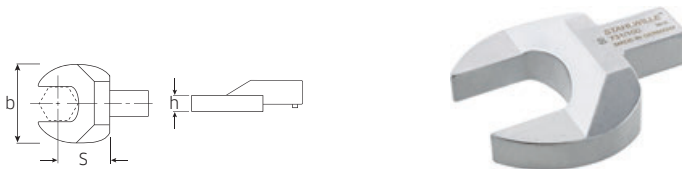

| Code        | mm | mm    | b mm | h mm | S mm | Δg   |
|-------------|----|-------|------|------|------|------|
| 58 21 10 24 | 24 | 22x28 | 50   | 13   | 55   | 618  |
| 58 21 10 27 | 27 | 22x28 | 56   | 14   | 55   | 640  |
| 58 21 10 30 | 30 | 22x28 | 63   | 15   | 55   | 690  |
| 58 21 10 32 | 32 | 22x28 | 67   | 15   | 55   | 705  |
| 58 21 10 34 | 34 | 22x28 | 72   | 15   | 55   | 731  |
| 58 21 10 36 | 36 | 22x28 | 74   | 15   | 55   | 713  |
| 58 21 10 41 | 41 | 22x28 | 84   | 16   | 55   | 894  |
| 58 21 10 46 | 46 | 22x28 | 94   | 17   | 55   | 934  |
| 58 21 10 50 | 50 | 22x28 | 104  | 18   | 55   | 1073 |
| 58 21 10 55 | 55 | 22x28 | 114  | 19   | 55   | 1172 |
| 58 21 10 60 | 60 | 22x28 | 124  | 20   | 55   | 1241 |

### 732/100 Ring insert tools

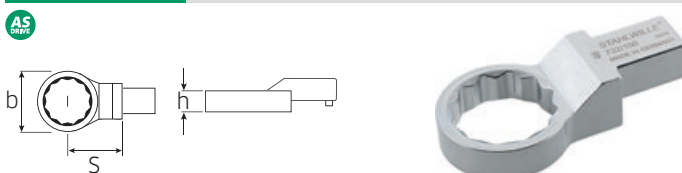

| Code        | mm | mm    | b mm | h mm | S mm | Δg  |
|-------------|----|-------|------|------|------|-----|
| 58 22 10 24 | 24 | 22x28 | 43   | 15   | 55   | 616 |
| 58 22 10 27 | 27 | 22x28 | 43   | 15   | 55   | 609 |
| 58 22 10 30 | 30 | 22x28 | 46   | 16   | 55   | 617 |
| 58 22 10 32 | 32 | 22x28 | 49   | 16   | 55   | 611 |
| 58 22 10 34 | 34 | 22x28 | 52   | 17   | 55   | 627 |
| 58 22 10 36 | 36 | 22x28 | 54   | 17   | 55   | 620 |
| 58 22 10 41 | 41 | 22x28 | 61   | 18   | 55   | 630 |
| 58 22 10 46 | 46 | 22x28 | 66   | 19   | 55   | 628 |
| 58 22 10 50 | 50 | 22x28 | 75   | 20   | 55   | 701 |
| 58 22 10 55 | 55 | 22x28 | 84   | 21   | 55   | 776 |
| 58 22 10 60 | 60 | 22x28 | 93   | 22   | 55   | 867 |

### 737/100 Blank end insert tool

- gunmetal finish
- to prevent damage from excessive temperatures, the locking pin, spring and washer are not fitted until the welding work has been completed
- instructions are supplied
- material: 1.2208 - 31CRV3



| Code        | Welding surface<br>h x b mm | mm    | H mm | L mm | Δg  |
|-------------|-----------------------------|-------|------|------|-----|
| 58 27 01 00 | 15 x 50                     | 22x28 | 32   | 24   | 483 |