

**FAG****2306-K-TVH-C3** [🔗](#)

Self-aligning ball bearing

Self-aligning ball bearing 23...-K-TVH, tapered bore taper 1:12, plastic cage

Technical information

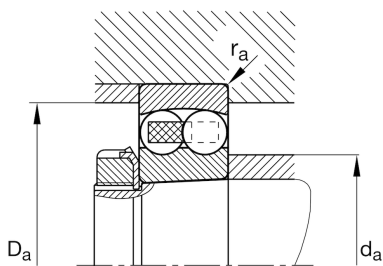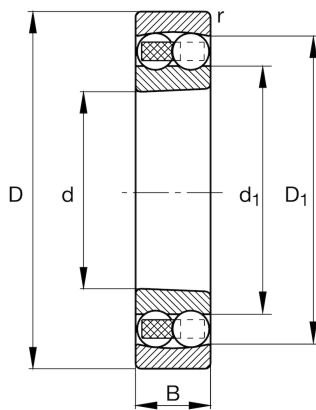

Main Dimensions & Performance Data

d	30 mm	Bore diameter
D	72 mm	Outside diameter
B	27 mm	Width
C _r	32.500 N	Basic dynamic load rating, radial
C _{0r}	8.800 N	Basic static load rating, radial
C _{ur}	560 N	Fatigue load limit, radial
n _G	10.200 1/min	Limiting speed
n _{gr}	10.400 1/min	Reference speed
≈m	0,49 kg	Weight

Mounting dimensions


d _{a min}	37 mm	Minimum diameter shaft shoulder
d _{a max}	40 mm	Maximum diameter shaft shoulder
D _{a max}	65 mm	Maximum diameter of housing shoulder
d _{b min}	35 mm	Minimum cavity diameter of the sleeve
B _{a min}	5 mm	Minimum cavity width of the sleeve
r _{a max}	1 mm	Maximum fillet radius

Dimensions

r _{min}	1,1 mm	Minimum chamfer dimension
D ₁	58,83 mm	Shoulder diameter outer ring
d ₁	41,45 mm	Shoulder diameter inner ring

Temperature range

T _{min}	-30 °C	Operating temperature min.
T _{max}	120 °C	Operating temperature max.

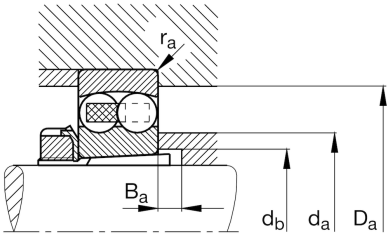

Calculation factors

e	0,45	Limiting value of Fa/Fr for the applicability of diff. Values of factors X and Y
Y ₁	1,4	Dynamic axial load factor
Y ₂	2,17	Dynamic axial load factor
Y ₀	1,47	Static axial load factor

Additional information

H2306	Adapter sleeve
-------	----------------