

Technical data

ESPG202


Bearing units

Grey cast housing, radial insert ball bearing with eccentric locking collar, single lip seal

KIT CONTENT

ES202G2, PG203

VISUAL (S)

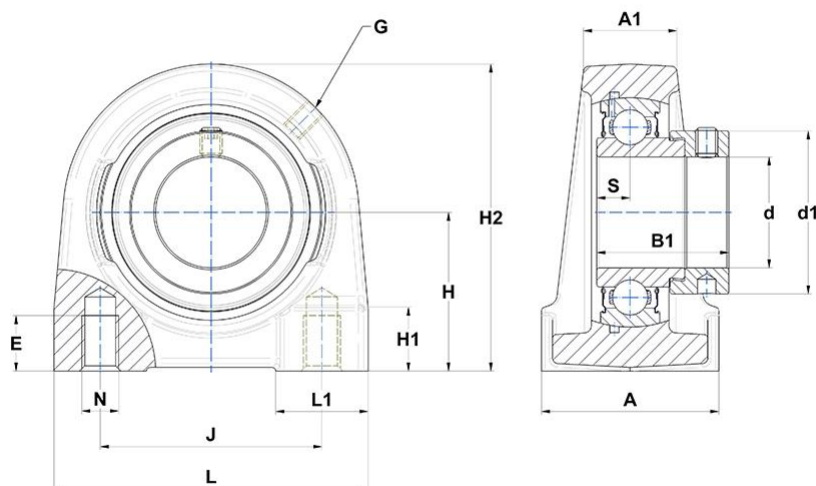

PRODUCT DEFINITION

A - Housing width	30 mm
A1 - Housing top width	13 mm
B - Width of Inner Ring	19,1 mm
d - Shaft diameter	15 mm
d1 - Outer dia of eccent. Lock. collar / nut of adapter sleeve	27,2 mm
E - Mounting hole thread depth	13 mm

PRODUCT DEFINITION

G - Grease fitting	M6x1
H - Distance mounting base to centerline spheric. seating diam.	30,2 mm
H1 - Housing foot height	14 mm
H2 - Housing height	57 mm
J - Mounting holes distance	38 mm
L - Housing length	55 mm
L1 - Housing foot length	17 mm
N - Mounting hole dimension	M6
S - Dist. cent. of raceway to face IR on side opp. lock. device	6,5 mm
Brand	SNR

PRODUCT PERFORMANCE

C - Dynamic load rating	9,55 kN
C0 - Static load rating	4,78 kN
Operating temperature min.	-20 °C
Operating temperature max.	100 °C

OTHER FEATURES

Mass	0,35 kg
Recommended tightening torque for set screw	5.5 N-m