

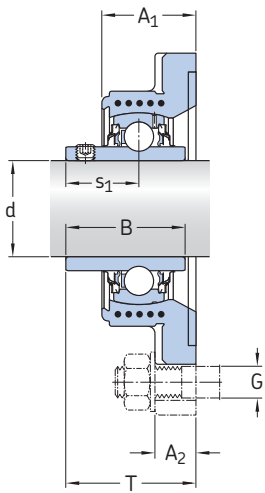


Composite SKF Food Line Y-bearing square flanged units stainless steel bearings, metric shafts
d 20 – 50 mm

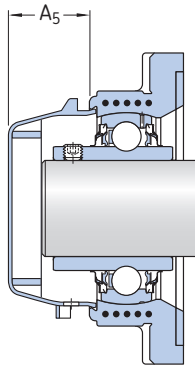

FYWK ..Y..

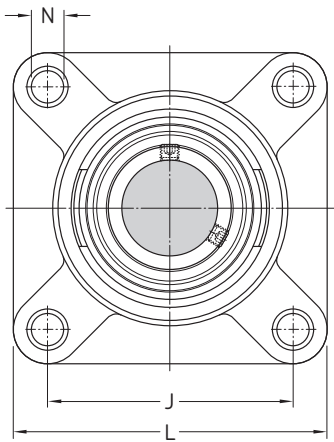

ECW 2..

Dimensions										Basic load ratings		Fatigue load limit	Designation
d	A ₁	A ₂	B	J	L	N	G	s ₁	T	C	C ₀	P _u	Bearing unit
mm										kN		kN	–
20	30	15	31	63,5	86	11,9	10	18,3	37,3	10,8	6,55	0,28	FYWK 20 YTH
25	31	15	34,1	70	95	11,9	10	19,8	38,8	11,9	7,8	0,335	FYWK 25 YTH
30	33	15,3	38,1	82,5	108	11,9	10	22,2	42,2	16,3	11,2	0,475	FYWK 30 YTH
35	35	17	42,9	92	118	14,3	12	25,4	46,4	21,6	15,3	0,655	FYWK 35 YTH
40	39	17	49,2	101,5	130	14,3	12	30,2	54,2	26	19	0,8	FYWK 40 YTH
50	43	21	51,6	111	143	17	16	32,6	57,6	29,6	23,2	0,98	FYWK 50 LTHR

As standard SKF Food Line Y-bearing units composite housings are lubricated for life. SKF does not recommend relubricating. If required units with relubrication fittings are available upon order. Please contact SKF for further details regarding delivery time and appropriate designations.