

# Our performance range at a glance



## Flow rate water



Using this flow rate diagram, you can identify, at a glance, the coupling series suited to your application and the corresponding operating pressure.


Many of the series listed below are also available as a straight-through KF version.

- Flow KF (l/min.) – straight-through coupling systems  
- Particularly suitable for pneumatic and fluid handling applications
- Flow KA (l/min.) – single shut-off coupling systems  
- Particularly suitable for pneumatic applications
- Flow KB (l/min.) – double shut-off coupling systems  
- Particularly suitable for fluid handling applications
- Flow KL (l/min.) – leak-free coupling systems  
- Particularly suitable for fluid handling applications

The details refer to the water flow rate in litres/minute.

Measurement data generated in accordance with ISO 7241/2:2000, pressure drop 0.5 bar

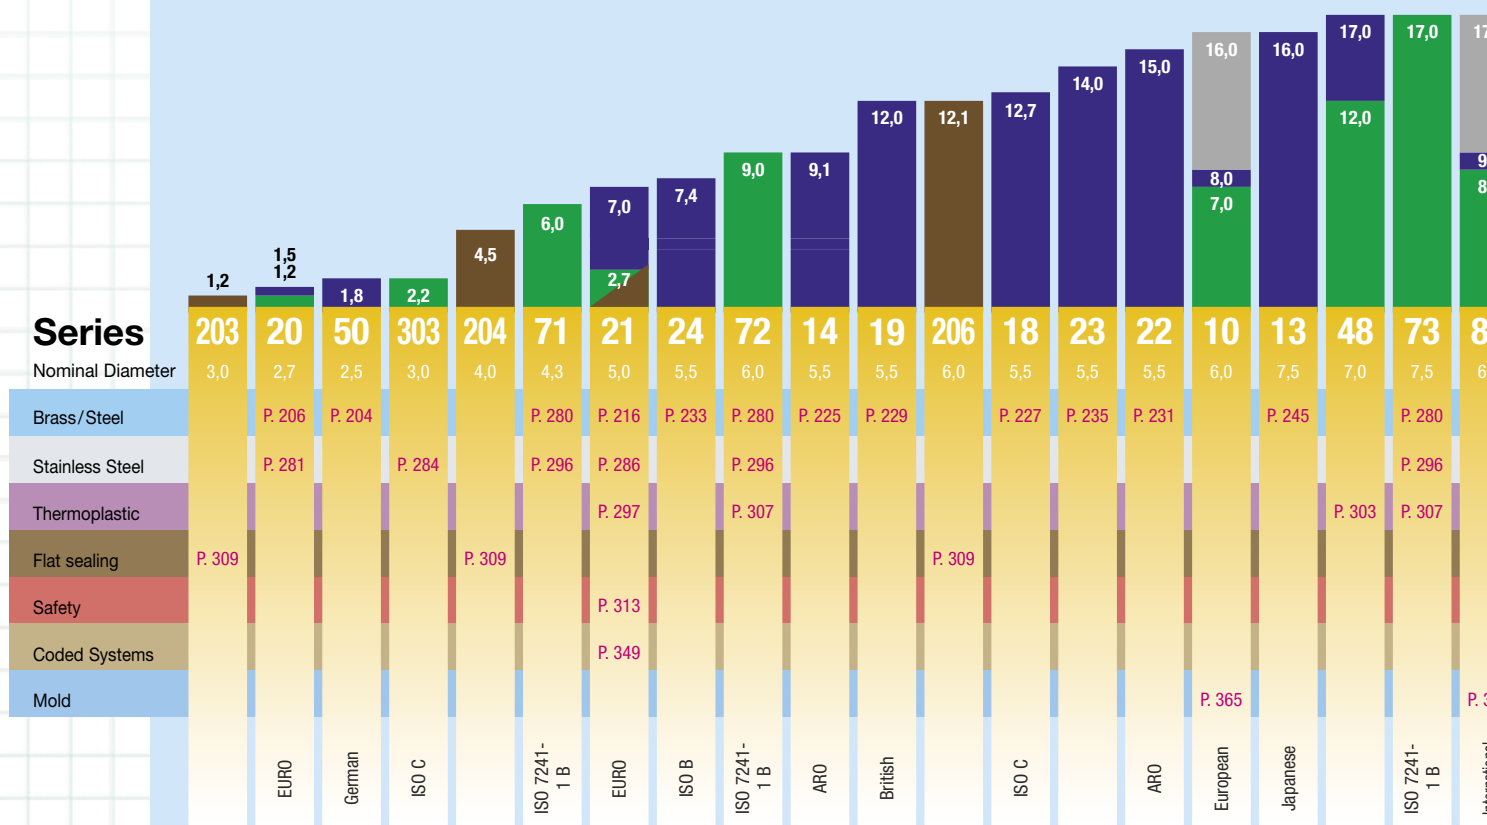




Single Shut-Off

50SFAW Plug without valve, Male Thread

Brass



A 


HEX L L1

G1/8 50SFAW10MXX

14 30 7

50SFIW Plug without valve, Female Thread

Brass



A 


HEX L L1

G1/8 50SFIW10MXX

14 30 7

50SFTF Plug without valve, Hose Barb

Brass



A 

HEX L L1

4 50SFTF04MXX

7 35 13

6 50SFTF06MXX

7 35 13