




Technical datasheet

N215C3

Single row cylindrical roller bearings

Single row cylindrical roller bearing, floating, separable, pressed steel cage

Visual(s)

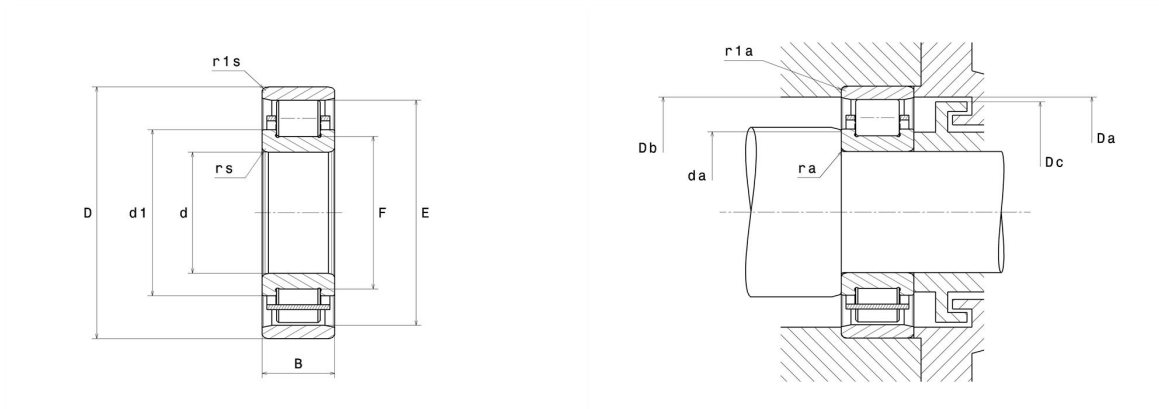

Product definition

d	75 mm
D	130 mm
B	25 mm
E	116.5 mm
F	88.5 mm
d1	94 mm
rs min	1.5 mm
r1s min	1.5 mm
Radial clearance class	C3
Mass (without HJ ring)	1.21 kg
Brand	NTN

Product performance

Dynamic load, C	96.5 kN
Static load, C0	111 kN
Fatigue limit load, Cu	13.4 kN
Nlim (oil)	6,000 rpm
Nlim (grease)	5,100 rpm
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.43 Hz
Characteristic rolling element frequency, BSF	7.18 Hz
Characteristic outer ring frequency, BPF0	6.91 Hz
Characteristic inner ring frequency, BPFI	9.09 Hz

Abutment dimensions

da min	83 mm
Da max	122 mm
Db min	118 mm
Dc max	115 mm
ra max	1.5 mm
r1a max	1.5 mm

Calculation factors

Equivalent dynamic radial load

$$P = Fr$$

Equivalent static radial load

$$Po = Fr$$