



T-Max® P head for turning

Lever clamp design

CoroTurn® SL - Precision coolant supply

KAPR
PSIR

95.0°
-5.0°



CNMM
 CNMG
 CNMA, CNGA

					Ordering code	Dimensions, mm, inch						MIID
						DCON	LF	WF	BAR PSI	NM	KG	
	09	3/8	25	34.0	1	25	28.0	19.0	80	1.7	0.08	CNMG 09 03 08
				1.339		.984	1.102	.748	1160			
	12	1/2	32	40.0	1	32	36.0	22.0	80	5.0	0.16	CNMG 12 04 08
				1.575		1.260	1.417	.866	1160			
			40	50.0	1	40	35.0	27.0	80	5.0	0.21	CNMG 12 04 08
				1.969		1.575	1.378	1.063	1160			
	16	5/8	40	56.0	1	40	42.0	27.0	80	5.0	0.27	CNMG 16 06 08
				2.205		1.575	1.654	1.063	1160			

For inserts, see Turning tools catalogue

R = Right hand, L = Left hand

Spare parts						
Ordering code	Lever	Screw	Shim	Shim pin	Locating tube	Nozzle
SL-PCLNR/L-25-09HP-G	174.3-845-1	174.3-829			5552 058-02	5691 026-13
SL-PCLNR/L-32-12HP	174.3-848M	174.3-858	171.31-850M	174.3-861	5638 031-01	5691 026-03
SL-PCLNR/L-40-12HP	174.3-841M	174.3-821	171.31-850M	174.3-861	5638 031-01	5691 026-03
SL-PCLNR/L-40-16HP	438.3-840	438.3-831	171.31-852	174.3-864	5638 031-01	5691 026-03

For complete list of spare parts, see www.sandvik.coromant.com



A5




D9



D8



D4

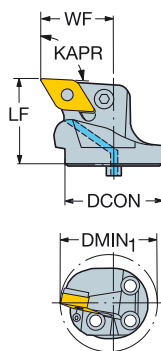 DNMA, DNGA

R = Right hand, L = Left hand

For complete list of spare parts, see www.sandvik.coromant.com

